
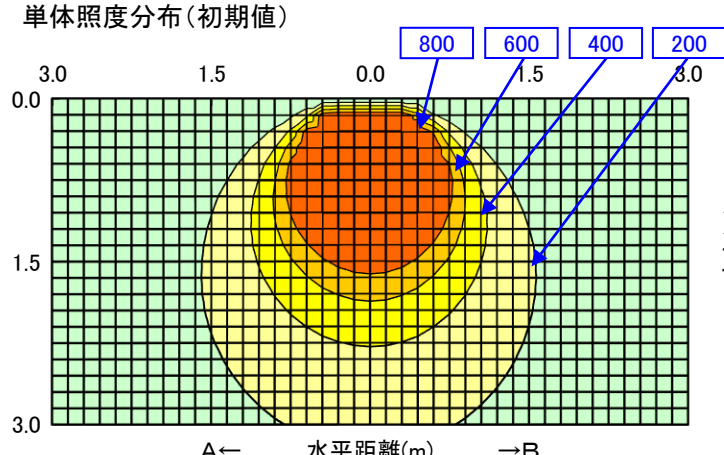
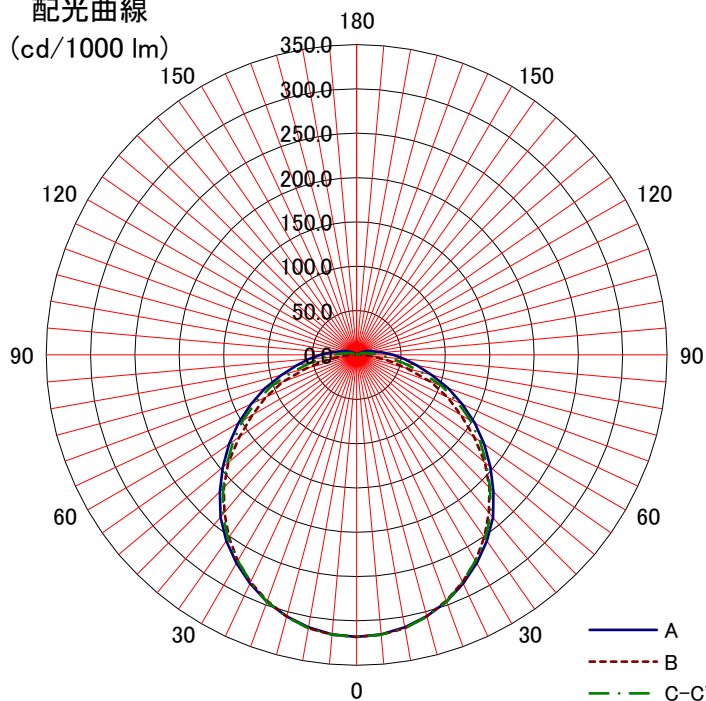


日立照明器具 照明特性

人感センサー付 名称: 交換形ベース器具 (トランプ形)		反 射 率	天井	80%			70%			50%			30%			0%	
形式: PC4A1SL			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%													
		室指数	固有照明率 S/H=1.0														
<備考>		0.6	0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28	
		0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.37	
姿図 		1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.51	0.46	0.43	
		1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50	
		1.5	0.82	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55	
		2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.70	0.66	0.63	
		2.5	0.92	0.85	0.79	0.90	0.83	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68	
		3	0.94	0.88	0.83	0.92	0.86	0.82	0.78	0.84	0.80	0.76	0.81	0.77	0.74	0.71	
光源形式 CE407LE-X14A		4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.80	0.76	
器具光束 6,560 lm		5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.80	
		7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.90	0.88	0.84	
		10	1.04	1.02	1.00	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88	
器具効率 Ft= 100%			<div>単体照度分布(初期値)</div> 														
上方光束 Fu= 3.5%																	
下方光束 Fd= 96.5%																	
最大取付間隔																	
A-A 1.28 H																	
B-B 1.26 H																	
保守率	良	0.88															
	中	0.86															
	否	0.81															
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	318	318	318														
10	312	313	313														
20	296	295	296														
30	271	268	268														
40	239	232	235														
50	197	189	191														
60	154	136	148														
70	110	89	102														
80	69	35	54														
90	41	5	25														
100	21	5	12														
110	13	3	6														
120	5	2	1														
130																	
140																	
150																	
160																	
170																	
180																	
			<div>配光曲線</div> <div>(cd/1000 lm)</div> 														
			<div>— A</div> <div>- - - B</div> <div>- · - C-C'</div>														