

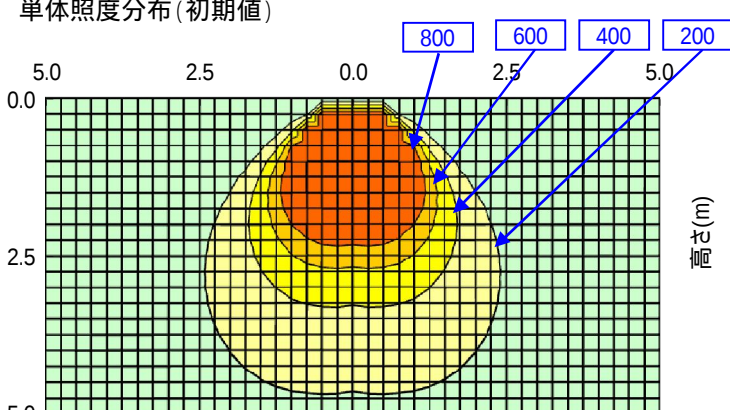
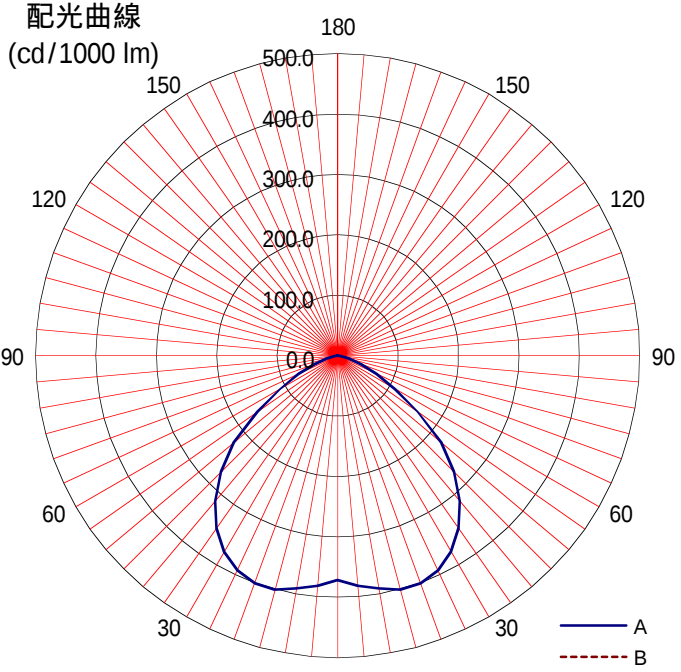


日立照明器具 照明特性

名称: 高天井用LEDラング (アームタイプ)	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: BME1101MN	室指数	固有照明率 S/H=1.0														
<備考>	0.6	0.63	0.52	0.45	0.62	0.51	0.45	0.40	0.50	0.44	0.40	0.49	0.44	0.40	0.38	
	0.8	0.73	0.63	0.56	0.72	0.62	0.56	0.51	0.61	0.55	0.51	0.60	0.55	0.51	0.49	
姿図 	1	0.79	0.70	0.64	0.78	0.70	0.63	0.59	0.68	0.63	0.58	0.67	0.62	0.58	0.56	
	1.25	0.85	0.77	0.71	0.84	0.76	0.71	0.66	0.75	0.70	0.66	0.73	0.69	0.65	0.63	
	1.5	0.89	0.82	0.77	0.88	0.81	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.71	0.69	
	2	0.94	0.89	0.84	0.93	0.88	0.83	0.80	0.86	0.82	0.79	0.84	0.81	0.78	0.76	
	2.5	0.97	0.92	0.88	0.96	0.91	0.87	0.84	0.89	0.86	0.83	0.87	0.85	0.82	0.80	
	3	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.92	0.89	0.86	0.90	0.87	0.85	0.83	
光源形式	4	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.92	0.90	0.93	0.91	0.89	0.86	
-	5	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89	
器具光束	7	1.05	1.03	1.01	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.98	0.97	0.96	0.93	
11,600 lm	10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.99	0.96	
器具効率 Ft= 100%		単体照度分布 (初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A 1.44 H																
B-B H																
保守率	良	0.81														
	中	0.79														
	否	0.75														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	371															
10	392															
20	402															
30	376															
40	315															
50	224															
60	110															
70	41															
80	5															
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																
配光曲線 (cd/1000 lm)																

単体照度分布 (初期値)

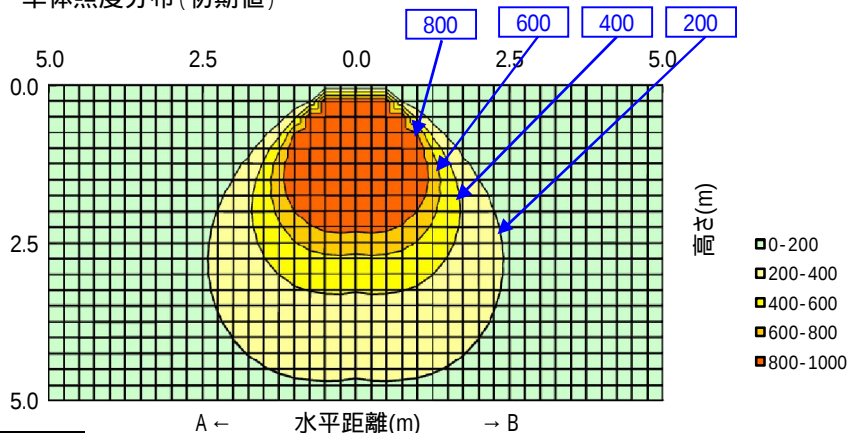

配光曲線
(cd/1000 lm)

