



日立照明器具 照明特性

名称: 高天井用LEDランプ (アームタイプ)	反射率	天井	80%				70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
形式: BME11AMNC1	室指数	固有照明率 S/H=1.0															
<備考>	0.6	0.61	0.50	0.43	0.60	0.50	0.43	0.38	0.49	0.42	0.38	0.48	0.42	0.38	0.36		
	0.8	0.72	0.61	0.54	0.70	0.61	0.54	0.49	0.59	0.53	0.49	0.58	0.53	0.48	0.47		
姿区 	1	0.78	0.69	0.62	0.77	0.68	0.62	0.57	0.67	0.61	0.56	0.65	0.60	0.56	0.54		
	1.25	0.84	0.76	0.69	0.83	0.75	0.69	0.64	0.73	0.68	0.64	0.72	0.67	0.63	0.61		
	1.5	0.88	0.81	0.75	0.87	0.80	0.75	0.70	0.78	0.74	0.70	0.77	0.73	0.69	0.67		
	2	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.81	0.77	0.83	0.80	0.77	0.74		
	2.5	0.96	0.91	0.87	0.95	0.90	0.86	0.83	0.88	0.85	0.82	0.87	0.84	0.81	0.79		
	3	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.82		
光源形式	4	1.01	0.97	0.94	0.99	0.96	0.93	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.86		
	5	1.03	1.00	0.97	1.01	0.99	0.96	0.94	0.96	0.94	0.93	0.94	0.93	0.91	0.89		
器具光束 11,500 lm	7	1.05	1.03	1.01	1.03	1.02	1.00	0.98	0.99	0.98	0.97	0.97	0.96	0.95	0.92		
	10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.98	0.95		

器具効率 Ft= 100%					
上方光束 Fu= 0%					
下方光束 Fd= 100%					
最大取付間隔					
A-A		1.50 H			
B-B		H			
保守率	良	0.81			
	中	0.79			
	否	0.75			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	347				
10	351				
20	372				
30	362				
40	317				
50	232				
60	120				
70	48				
80	7				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					


単体照度分布(初期値)

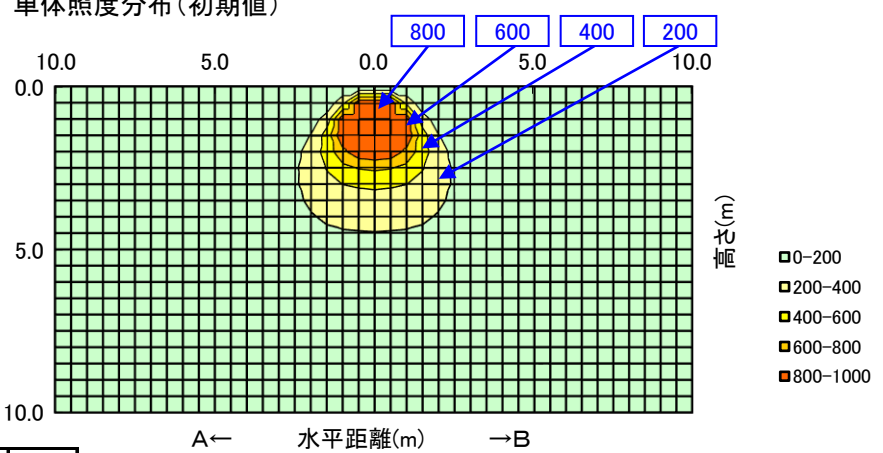

10.0 5.0 0.0 5.0 10.0
0.0 5.0 10.0
A← 水平距離(m) →B
(m) 吊钩
0-200
200-400
400-600
600-800
800-1000

配光曲線

(cd/1000 lm)

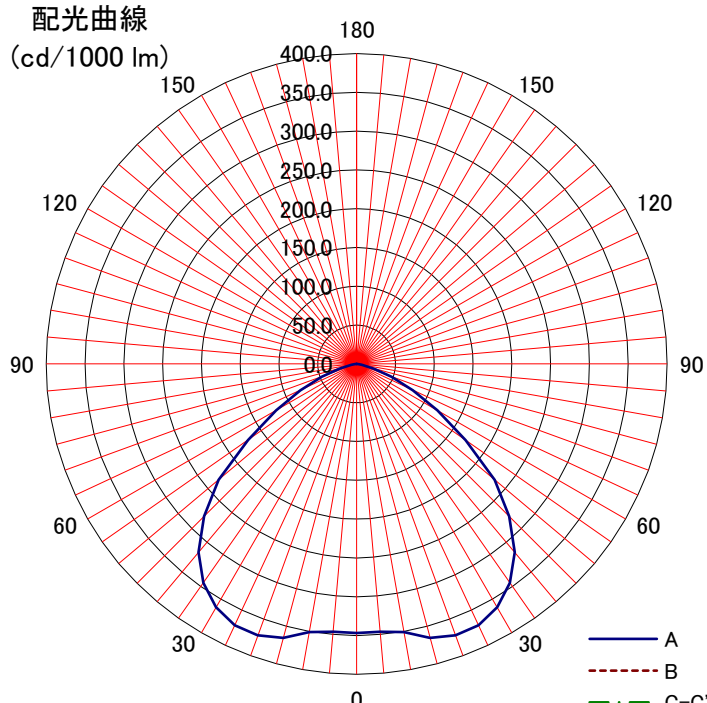

180 150 120 90 60 30 0
400.0 350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0
A
B
C-C'