



日立照明器具 照明特性

名称: 高天井用LEDラング (アームタイプ)	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: BME2101MN	室指数	固有照明率 S/H=1.0														
<備考>	0.6	0.62	0.51	0.44	0.61	0.51	0.44	0.39	0.50	0.44	0.39	0.49	0.43	0.39	0.37	
	0.8	0.73	0.62	0.56	0.71	0.62	0.55	0.50	0.61	0.55	0.50	0.59	0.54	0.50	0.48	
姿図 	1	0.79	0.70	0.63	0.78	0.69	0.63	0.58	0.68	0.62	0.58	0.66	0.61	0.58	0.56	
	1.25	0.85	0.77	0.71	0.83	0.76	0.70	0.66	0.74	0.69	0.65	0.73	0.68	0.65	0.63	
	1.5	0.89	0.82	0.76	0.87	0.81	0.76	0.71	0.79	0.75	0.71	0.77	0.74	0.70	0.68	
	2	0.94	0.88	0.83	0.93	0.87	0.83	0.79	0.85	0.82	0.78	0.84	0.80	0.78	0.75	
	2.5	0.97	0.92	0.88	0.95	0.91	0.87	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.79	
	3	0.99	0.94	0.91	0.97	0.93	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.85	0.82	
	4	1.01	0.98	0.95	1.00	0.97	0.94	0.91	0.95	0.92	0.90	0.93	0.91	0.89	0.86	
光源形式 -	5	1.03	1.00	0.97	1.01	0.99	0.97	0.94	0.97	0.95	0.93	0.95	0.93	0.92	0.89	
器具光束 21,500 lm	7	1.05	1.03	1.01	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.98	0.96	0.95	0.93	
	10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.98	0.96	

器具効率 Ft= 100%					
上方光束 Fu= 0%					
下方光束 Fd= 100%					
最大取付間隔					
A-A 1.42		H			
B-B		H			
保守率	良	0.81			
	中	0.79			
	否	0.75			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	372				
10	390				
20	394				
30	371				
40	308				
50	225				
60	119				
70	42				
80	6				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					


単体照度分布 (初期値)

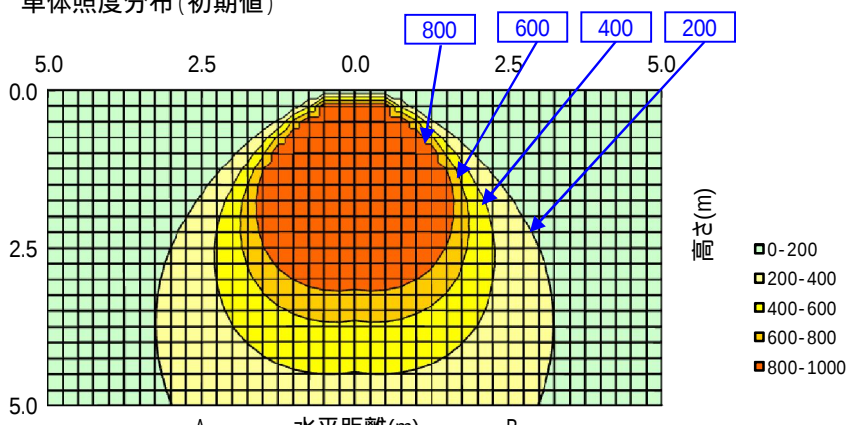

単位: 照度 (lx)

0-200
200-400
400-600
600-800
800-1000

配光曲線
(cd/1000 lm)

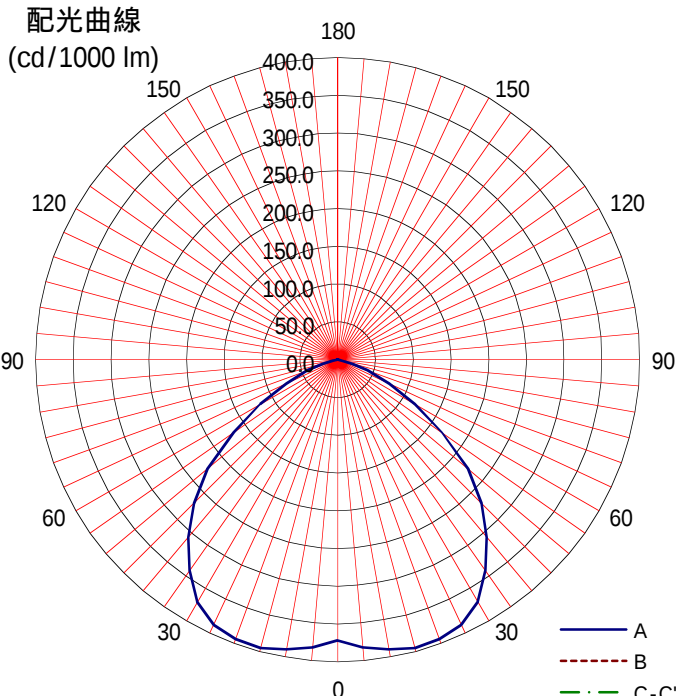

単位: 照度 (cd/1000 lm)

A
B
C-C'