
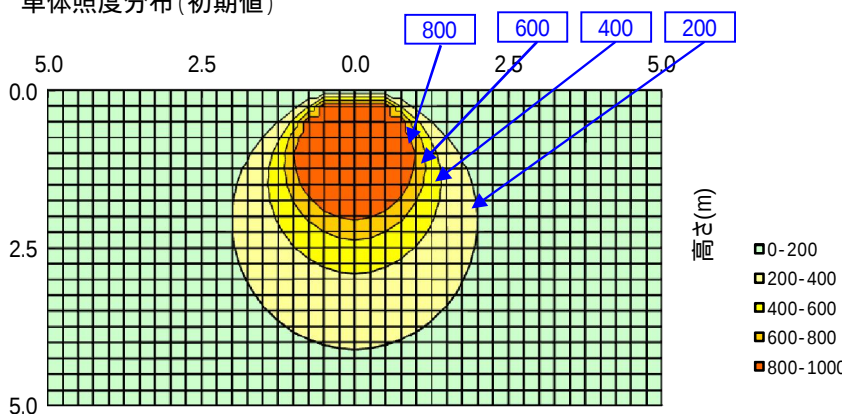
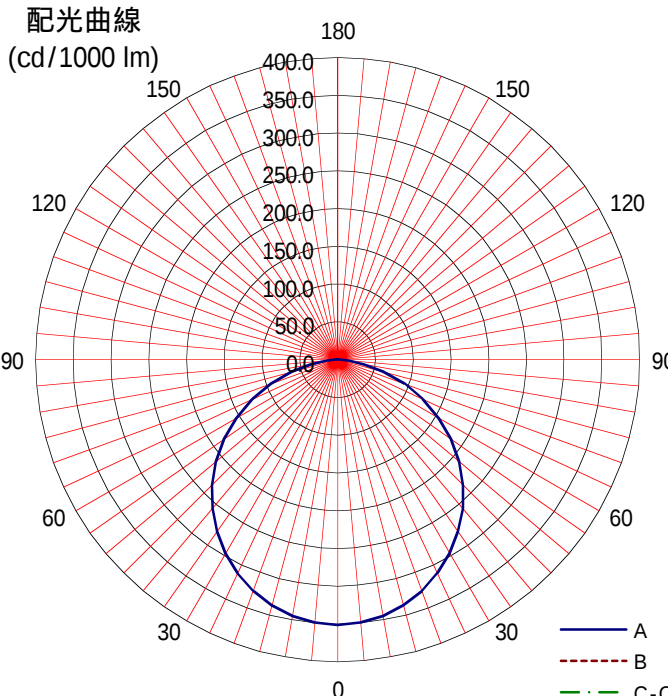


日立照明器具 照明特性

名称: 高天井用LEDラング (アームタイプ)	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: BMEP1101MN	室指数	固有照明率 S/H=1.0														
<備考> 拡散カバー	0.6	0.58	0.46	0.39	0.57	0.46	0.39	0.33	0.45	0.38	0.33	0.44	0.38	0.33	0.31	
	0.8	0.68	0.57	0.49	0.67	0.56	0.49	0.43	0.55	0.48	0.43	0.53	0.47	0.43	0.41	
姿図 	1	0.75	0.64	0.56	0.73	0.63	0.56	0.51	0.62	0.55	0.50	0.60	0.54	0.50	0.48	
	1.25	0.80	0.71	0.64	0.79	0.70	0.63	0.58	0.68	0.62	0.57	0.66	0.61	0.57	0.55	
	1.5	0.85	0.76	0.70	0.83	0.75	0.69	0.64	0.73	0.68	0.63	0.72	0.67	0.63	0.60	
	2	0.90	0.83	0.78	0.89	0.82	0.77	0.72	0.80	0.76	0.71	0.78	0.74	0.71	0.68	
	2.5	0.94	0.88	0.82	0.92	0.87	0.82	0.78	0.84	0.80	0.77	0.82	0.79	0.76	0.73	
	3	0.96	0.91	0.86	0.94	0.90	0.85	0.81	0.87	0.84	0.80	0.85	0.82	0.79	0.77	
光源形式	4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.84	0.82	
	5	1.01	0.97	0.94	1.00	0.96	0.93	0.91	0.94	0.91	0.89	0.92	0.90	0.88	0.85	
器具光束	7	1.03	1.01	0.98	1.02	1.00	0.97	0.95	0.97	0.96	0.94	0.95	0.94	0.92	0.89	
	9,600 lm	10	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.93

器具効率 Ft= 100%			単体照度分布 (初期値) 																	
上方光束 Fu= 0%																				
下方光束 Fd= 100%																				
最大取付間隔																				
A-A 1.26 H																				
B-B H																				
保守率	良	0.81																		
	中	0.79																		
	否	0.75																		
光度 (cd/1000 lm)			配光曲線 (cd/1000 lm) 																	
	A-0	B-B																C-0	A'-0	C'-0
0	352																			
10	345																			
20	326																			
30	297																			
40	258																			
50	211																			
60	155																			
70	94																			
80	36																			
90	2																			
100																				
110																				
120																				
130																				
140																				
150																				
160																				
170																				
180																				