



日立照明器具 照明特性

名称: 高天井用LEDランプ (アームタイプ)	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: BMEP1601MNC	室指数	固有照明率 S/H=1.0														
<備考> 拡散パネル付	0.6	0.61	0.49	0.42	0.60	0.49	0.42	0.37	0.48	0.41	0.37	0.47	0.41	0.37	0.35	
	0.8	0.70	0.60	0.52	0.69	0.59	0.52	0.47	0.58	0.51	0.47	0.57	0.51	0.47	0.45	
姿図 	1	0.77	0.67	0.60	0.75	0.66	0.59	0.54	0.65	0.59	0.54	0.63	0.58	0.53	0.51	
	1.25	0.82	0.74	0.67	0.81	0.73	0.66	0.61	0.71	0.65	0.61	0.69	0.64	0.60	0.58	
	1.5	0.87	0.79	0.72	0.85	0.78	0.72	0.67	0.76	0.71	0.67	0.74	0.70	0.66	0.64	
	2	0.92	0.85	0.80	0.91	0.84	0.79	0.75	0.82	0.78	0.74	0.81	0.77	0.74	0.71	
	2.5	0.95	0.89	0.85	0.94	0.88	0.84	0.80	0.86	0.83	0.79	0.84	0.81	0.78	0.76	
	3	0.97	0.92	0.88	0.96	0.91	0.87	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.79	
	4	1.00	0.96	0.93	0.99	0.95	0.92	0.89	0.93	0.90	0.87	0.91	0.88	0.86	0.84	
光源形式	5	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.95	0.93	0.91	0.93	0.91	0.89	0.87	
-	7	1.04	1.02	1.00	1.03	1.01	0.99	0.97	0.98	0.97	0.95	0.96	0.95	0.94	0.91	
器具光束	10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.94	
16,700 lm																

器具効率 Ft= 100%					
上方光束 Fu= 0%					
下方光束 Fd= 100%					
最大取付間隔					
A-A		1.20 H			
B-B		H			
保守率	良	0.81			
	中	0.79			
	否	0.75			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	408				
10	399				
20	371				
30	326				
40	269				
50	200				
60	139				
70	80				
80	26				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布 (初期値)

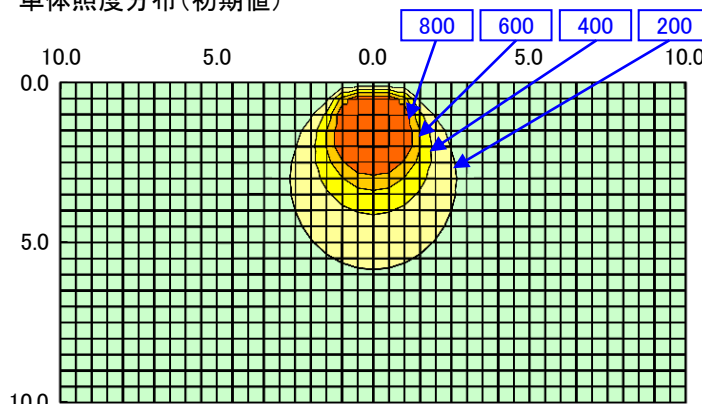

10.0 5.0 0.0 5.0 10.0


0.0 5.0 10.0

A← 水平距離(m) →B

(m) 軸

- 0-200
- 200-400
- 400-600
- 600-800
- 800-1000

配光曲線 (cd/1000 lm)

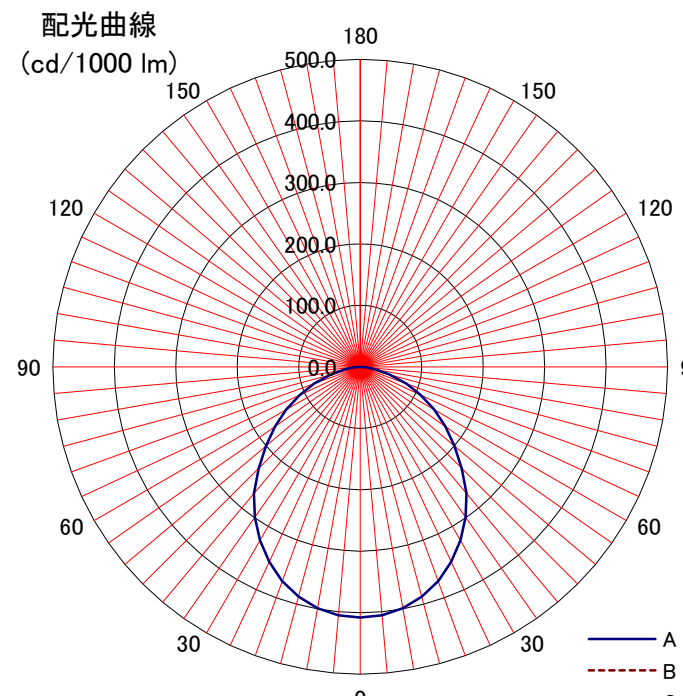

180 150 120 90 60 30 0

500.0 400.0 300.0 200.0 100.0 0.0

A B C-C'