
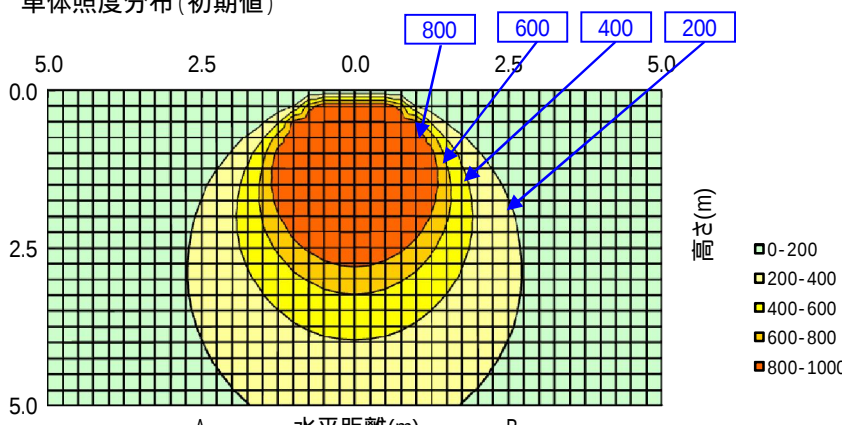
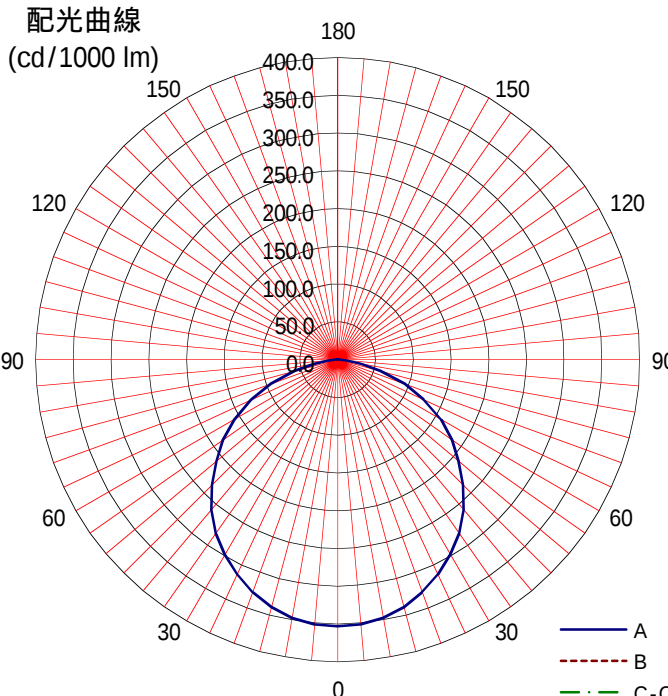


日立照明器具 照明特性

名称: 高天井用LEDラング (アームタイプ)	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: BMEP2101MN	室指数	固有照明率 S/H=1.0														
<備考> 拡散カバー	0.6	0.59	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.38	0.33	0.44	0.38	0.33	0.31	
	0.8	0.68	0.57	0.49	0.67	0.56	0.49	0.44	0.55	0.48	0.43	0.54	0.48	0.43	0.41	
姿図 	1	0.75	0.64	0.57	0.73	0.63	0.56	0.51	0.62	0.55	0.50	0.60	0.55	0.50	0.48	
	1.25	0.81	0.71	0.64	0.79	0.70	0.63	0.58	0.68	0.62	0.58	0.67	0.62	0.57	0.55	
	1.5	0.85	0.76	0.70	0.83	0.76	0.69	0.64	0.74	0.68	0.64	0.72	0.67	0.63	0.61	
	2	0.91	0.84	0.78	0.89	0.83	0.77	0.73	0.81	0.76	0.72	0.79	0.75	0.71	0.69	
	2.5	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.81	0.77	0.83	0.79	0.76	0.74	
	3	0.96	0.91	0.86	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.82	0.80	0.77	
光源形式	4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.92	0.89	0.86	0.89	0.87	0.85	0.82	
-	5	1.01	0.98	0.95	1.00	0.97	0.94	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85	
器具光束	7	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.95	0.94	0.93	0.90	
17,800 lm	10	1.05	1.04	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.93	

器具効率 Ft= 100%			単体照度分布 (初期値) 			
上方光束 Fu= 0%						
下方光束 Fd= 100%						
最大取付間隔						
A-A 1.26 H						
B-B H						
保守率	良	0.81	配光曲線 (cd/1000 lm) 			
	中	0.79				
	否	0.75				
光度 (cd/1000 lm)						
	A-0	B-B		C-0	A'-0	C'-0
0	353					
10	347					
20	328					
30	298					
40	260					
50	210					
60	158					
70	94					
80	31					
90	1					
100						
110						
120						
130						
140						
150						
160						
170						
180						