


日立照明器具 照明特性

形式：FD2101A-EG			反 射 率	天井	80%			70%				50%			30%			0%		
				壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
				床	10%															0%
				室指数																照明率 S/H=1.0
姿図 			0.6	0.38	0.31	0.27	0.37	0.31	0.27	0.24	0.30	0.27	0.24	0.30	0.26	0.24	0.23			
			0.8	0.44	0.38	0.34	0.43	0.38	0.34	0.31	0.37	0.34	0.31	0.36	0.33	0.31	0.30			
			1	0.48	0.43	0.39	0.47	0.42	0.39	0.36	0.42	0.38	0.36	0.41	0.38	0.36	0.34			
			1.25	0.52	0.47	0.43	0.51	0.46	0.43	0.41	0.46	0.43	0.40	0.45	0.42	0.40	0.39			
			1.5	0.54	0.50	0.47	0.53	0.50	0.47	0.44	0.49	0.46	0.44	0.48	0.45	0.43	0.42			
			2	0.57	0.54	0.51	0.56	0.53	0.51	0.49	0.52	0.50	0.48	0.51	0.49	0.48	0.46			
			2.5	0.59	0.56	0.54	0.58	0.55	0.53	0.51	0.54	0.52	0.51	0.53	0.52	0.50	0.49			
			3	0.60	0.57	0.55	0.59	0.57	0.55	0.53	0.56	0.54	0.52	0.54	0.53	0.52	0.50			
光源			4	0.61	0.59	0.58	0.60	0.59	0.57	0.56	0.57	0.56	0.55	0.56	0.55	0.54	0.53			
品名	コンパクト形蛍光灯		5	0.62	0.61	0.59	0.61	0.60	0.59	0.57	0.59	0.58	0.57	0.58	0.57	0.56	0.54			
形式	FDL18EX-N		7	0.63	0.62	0.61	0.63	0.62	0.61	0.60	0.60	0.60	0.59	0.59	0.59	0.58	0.56			
光束	1,070 lm		10	0.64	0.64	0.63	0.64	0.63	0.62	0.62	0.62	0.61	0.61	0.61	0.60	0.60	0.58			

器具効率 Ft= 60.2%
 上方光束 Fu= 0.0%
 下方光束 Fd= 60.2%

配光分類

BZ-

最大取付間隔

A-A 1.68 H


B-B H

保守率	良	0.75
	中	0.70
	否	0.65

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	182		
10	215		
20	240		
30	241		
40	202		
50	142		
60	67		
70	11		
80			
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

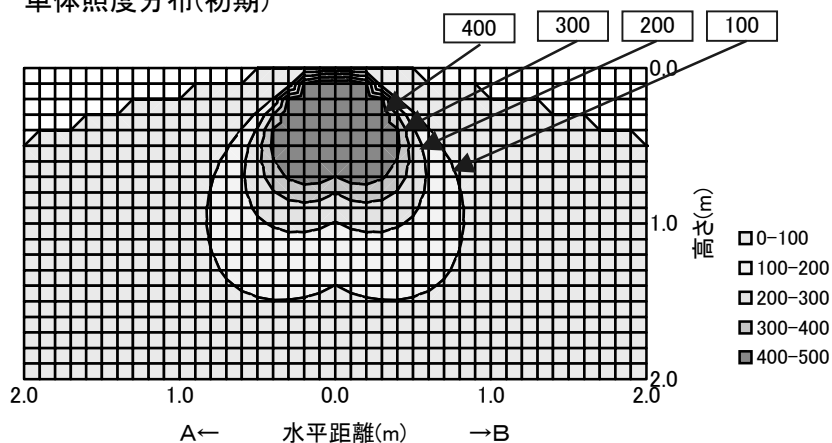

配光曲線

