


日立照明器具 照明特性

形式: FD2104A-EG		反 射 率	天井	80%			70%				50%			30%			0%		
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
姿図 		0.6	0.29	0.24	0.21	0.29	0.24	0.21	0.19	0.24	0.21	0.19	0.23	0.21	0.19	0.18			
		0.8	0.34	0.29	0.26	0.33	0.29	0.26	0.24	0.29	0.26	0.24	0.28	0.26	0.24	0.23			
		1	0.37	0.33	0.30	0.36	0.32	0.30	0.27	0.32	0.29	0.27	0.31	0.29	0.27	0.26			
		1.25	0.40	0.36	0.33	0.39	0.35	0.33	0.31	0.35	0.32	0.31	0.34	0.32	0.30	0.29			
		1.5	0.41	0.38	0.36	0.41	0.38	0.35	0.33	0.37	0.35	0.33	0.36	0.34	0.33	0.32			
		2	0.44	0.41	0.39	0.43	0.41	0.39	0.37	0.40	0.38	0.36	0.39	0.37	0.36	0.35			
		2.5	0.45	0.43	0.41	0.44	0.42	0.40	0.39	0.41	0.40	0.38	0.41	0.39	0.38	0.37			
		3	0.46	0.44	0.42	0.45	0.43	0.42	0.40	0.42	0.41	0.40	0.42	0.40	0.39	0.38			
光源		4	0.47	0.45	0.44	0.46	0.45	0.44	0.42	0.44	0.43	0.42	0.43	0.42	0.41	0.40			
品名	コンパクト形蛍光ランプ	5	0.48	0.46	0.45	0.47	0.46	0.45	0.44	0.45	0.44	0.43	0.44	0.43	0.43	0.41			
形式	FDL18EX-N	7	0.49	0.48	0.47	0.48	0.47	0.47	0.46	0.46	0.46	0.45	0.45	0.45	0.44	0.43			
光束	1,070 lm	10	0.49	0.49	0.48	0.49	0.48	0.48	0.47	0.47	0.47	0.47	0.46	0.46	0.46	0.44			

器具効率 Ft= 46.4%
 上方光束 Fu= 0.0%
 下方光束 Fd= 46.4%


配光分類
BZ-

最大取付間隔
 A-A 1.28 H
 B-B H

保守率	良	0.75
	中	0.70
	否	0.65

光度 (cd/1000 lm)			
	A-0	B-B	C-0
0	201		
10	203		
20	191		
30	175		
40	142		
50	92		
60	52		
70	23		
80	4		
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

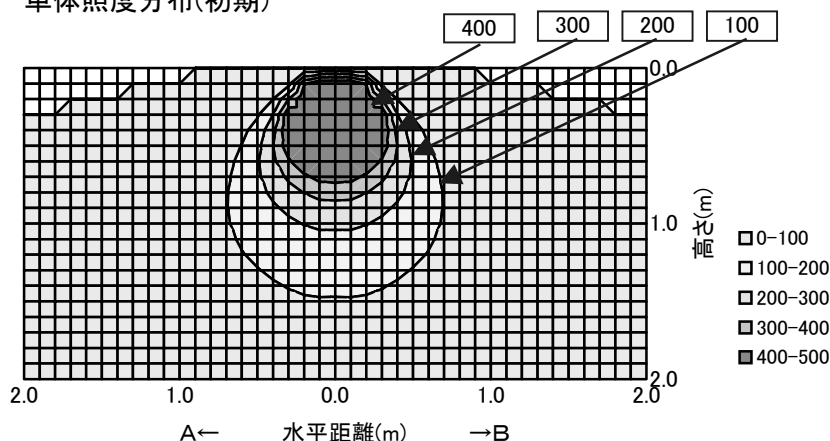

配光曲線

