


日立照明器具 照明特性

形式：FD2105A-EG		反 射 率	天井 壁 床 室指数	80%			70%				50%			30%			0%	
				70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
				10%														0%
				照明率 S/H=1.0														
姿図 		0.6	0.36	0.29	0.25	0.36	0.29	0.25	0.22	0.28	0.24	0.22	0.28	0.24	0.21	0.20		
		0.8	0.43	0.37	0.32	0.42	0.36	0.32	0.29	0.36	0.32	0.29	0.35	0.31	0.29	0.28		
		1	0.48	0.42	0.38	0.47	0.41	0.37	0.34	0.40	0.37	0.34	0.40	0.36	0.34	0.33		
		1.25	0.51	0.46	0.42	0.50	0.46	0.42	0.39	0.45	0.42	0.39	0.44	0.41	0.39	0.37		
		1.5	0.54	0.50	0.46	0.53	0.49	0.46	0.43	0.48	0.45	0.43	0.47	0.44	0.42	0.41		
		2	0.57	0.54	0.51	0.56	0.53	0.50	0.48	0.52	0.50	0.48	0.51	0.49	0.47	0.46		
		2.5	0.59	0.56	0.54	0.58	0.55	0.53	0.51	0.54	0.52	0.50	0.53	0.51	0.50	0.48		
		3	0.60	0.58	0.55	0.59	0.57	0.55	0.53	0.56	0.54	0.52	0.55	0.53	0.52	0.50		
光 源		4	0.62	0.60	0.58	0.61	0.59	0.57	0.56	0.58	0.56	0.55	0.56	0.55	0.54	0.53		
品名	コンパクト形蛍光灯	5	0.63	0.61	0.60	0.62	0.60	0.59	0.58	0.59	0.58	0.57	0.58	0.57	0.56	0.54		
形式	FDL18EX-N	7	0.64	0.63	0.62	0.63	0.62	0.61	0.60	0.61	0.60	0.59	0.60	0.59	0.58	0.57		
光束	1,070 lm	10	0.65	0.64	0.64	0.64	0.64	0.63	0.62	0.62	0.62	0.61	0.61	0.61	0.60	0.59		

器具効率 Ft= 61.0%
 上方光束 Fu= 0.0%
 下方光束 Fd= 61.0%

配光分類

BZ-

最大取付間隔

A-A 1.70 H


B-B 1.70 H

保守率	良	0.75
	中	0.70
	否	0.65

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	178	178	178
10	188	195	192
20	198	210	204
30	203	218	211
40	200	200	200
50	178	160	169
60	118	75	97
70	3	2	3
80	1	1	1
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

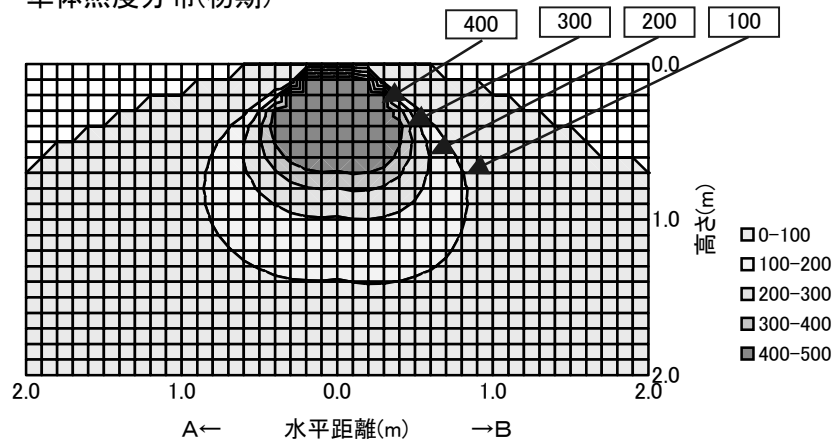

配光曲線

