

日立照明器具 照明特性

形式: FD3101A-EG		反 射 率	天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
姿図 		0.6	0.41	0.34	0.30	0.40	0.34	0.30	0.27	0.33	0.29	0.27	0.32	0.29	0.27	0.26		
		0.8	0.47	0.41	0.37	0.46	0.41	0.37	0.34	0.40	0.36	0.34	0.39	0.36	0.34	0.32		
		1	0.51	0.46	0.42	0.50	0.45	0.41	0.39	0.44	0.41	0.39	0.43	0.41	0.38	0.37		
		1.25	0.54	0.50	0.46	0.53	0.49	0.46	0.43	0.48	0.45	0.43	0.47	0.45	0.43	0.41		
		1.5	0.57	0.53	0.49	0.56	0.52	0.49	0.47	0.51	0.48	0.46	0.50	0.48	0.46	0.45		
		2	0.60	0.56	0.54	0.59	0.56	0.53	0.51	0.55	0.53	0.51	0.54	0.52	0.50	0.49		
		2.5	0.61	0.58	0.56	0.60	0.58	0.56	0.54	0.57	0.55	0.53	0.56	0.54	0.53	0.51		
		3	0.62	0.60	0.58	0.61	0.59	0.57	0.56	0.58	0.56	0.55	0.57	0.55	0.54	0.53		
光源		4	0.64	0.62	0.60	0.63	0.61	0.59	0.58	0.60	0.58	0.57	0.59	0.57	0.56	0.55		
品名	コンパクト形蛍光灯	5	0.65	0.63	0.62	0.64	0.62	0.61	0.60	0.61	0.60	0.59	0.60	0.59	0.58	0.57		
形式	FDL27EX-N	7	0.66	0.65	0.64	0.65	0.64	0.63	0.62	0.63	0.62	0.61	0.61	0.61	0.60	0.59		
光束	1,550 lm	10	0.67	0.66	0.65	0.66	0.65	0.65	0.64	0.64	0.64	0.63	0.63	0.62	0.62	0.60		

器具効率 Ft= 62.4%

上方光束 Fu= 0.0%

下方光束 Fd= 62.4%

配光分類

BZ-

最大取付間隔

A-A 1.42 H


B-B H

保守率	良	0.75
	中	0.70
	否	0.65

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	246		
10	278		
20	275		
30	250		
40	200		
50	137		
60	63		
70	11		
80			
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

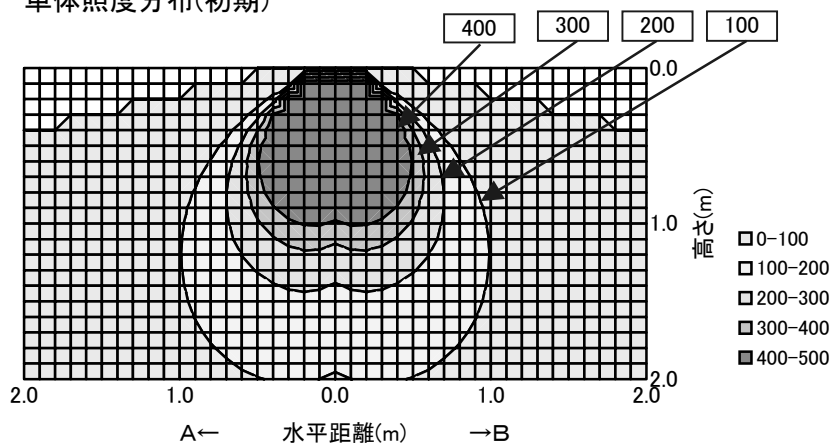

配光曲線

