


日立照明器具 照明特性

形式：FD3104A-EG			反 射 率	天井	80%			70%				50%			30%			0%		
				壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
				床	10%															0%
				室指数	照明率 S/H=1.0															
姿図 			0.6	0.31	0.25	0.22	0.30	0.25	0.22	0.20	0.25	0.22	0.20	0.24	0.22	0.20	0.19			
			0.8	0.35	0.31	0.27	0.35	0.30	0.27	0.25	0.30	0.27	0.25	0.29	0.27	0.25	0.24			
			1	0.38	0.34	0.31	0.38	0.34	0.31	0.28	0.33	0.30	0.28	0.32	0.30	0.28	0.27			
			1.25	0.41	0.37	0.34	0.40	0.37	0.34	0.32	0.36	0.34	0.32	0.35	0.33	0.31	0.30			
			1.5	0.43	0.40	0.37	0.42	0.39	0.37	0.35	0.38	0.36	0.34	0.37	0.36	0.34	0.33			
			2	0.45	0.43	0.40	0.45	0.42	0.40	0.38	0.41	0.39	0.38	0.40	0.39	0.37	0.36			
			2.5	0.47	0.44	0.42	0.46	0.44	0.42	0.40	0.43	0.41	0.40	0.42	0.41	0.39	0.38			
			3	0.48	0.45	0.44	0.47	0.45	0.43	0.42	0.44	0.43	0.41	0.43	0.42	0.41	0.40			
光源			4	0.49	0.47	0.46	0.48	0.47	0.45	0.44	0.46	0.44	0.43	0.45	0.44	0.43	0.42			
品名	コンパクト形蛍光ランプ		5	0.49	0.48	0.47	0.49	0.48	0.47	0.46	0.47	0.46	0.45	0.46	0.45	0.44	0.43			
形式	FDL27EX-L		7	0.50	0.50	0.49	0.50	0.49	0.48	0.48	0.48	0.47	0.47	0.47	0.46	0.46	0.45			
光束	1,550 lm		10	0.51	0.51	0.50	0.51	0.50	0.50	0.49	0.49	0.49	0.48	0.48	0.48	0.47	0.46			

器具効率 $F_t = 48.1\%$
 上方光束 $F_u = 0.0\%$
 下方光束 $F_d = 48.1\%$

配光分類

BZ-

最大取付間隔

A-A 1.28 H


B-B H

保守率	良	0.75
	中	0.70
	否	0.65

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	209		
10	211		
20	198		
30	182		
40	147		
50	95		
60	54		
70	24		
80	4		
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

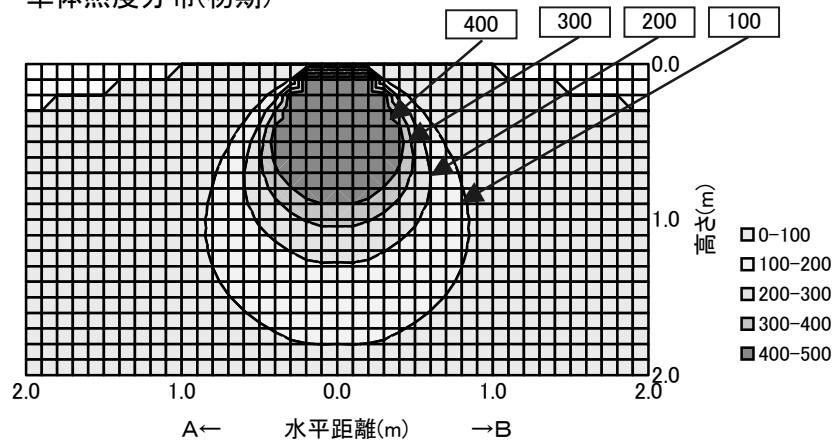

配光曲線

