


日立照明器具 照明特性

形式：FD5101A-EG			反 射 率	天井	80%			70%				50%			30%			0%			
				壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
				床	10%																0%
				室指数	照明率 S/H=1.0																
姿図 			0.6	0.35	0.28	0.24	0.34	0.28	0.24	0.21	0.28	0.24	0.21	0.27	0.24	0.21	0.20				
			0.8	0.41	0.35	0.31	0.41	0.35	0.31	0.28	0.34	0.31	0.28	0.34	0.30	0.28	0.27				
			1	0.46	0.40	0.36	0.45	0.40	0.36	0.33	0.39	0.36	0.33	0.38	0.35	0.33	0.32				
			1.25	0.49	0.44	0.41	0.48	0.44	0.40	0.38	0.43	0.40	0.38	0.42	0.39	0.37	0.36				
			1.5	0.51	0.47	0.44	0.51	0.47	0.44	0.41	0.46	0.43	0.41	0.45	0.43	0.41	0.39				
			2	0.55	0.51	0.49	0.54	0.51	0.48	0.46	0.50	0.47	0.46	0.49	0.47	0.45	0.44				
			2.5	0.56	0.53	0.51	0.55	0.53	0.51	0.49	0.52	0.50	0.48	0.51	0.49	0.48	0.46				
			3	0.57	0.55	0.53	0.56	0.54	0.52	0.50	0.53	0.51	0.50	0.52	0.50	0.49	0.48				
光源			4	0.59	0.57	0.55	0.58	0.56	0.54	0.53	0.55	0.54	0.52	0.54	0.53	0.52	0.50				
品名	コンパクト形蛍光ランプ		5	0.60	0.58	0.57	0.59	0.57	0.56	0.55	0.56	0.55	0.54	0.55	0.54	0.53	0.52				
形式	FDL13EX-N		7	0.61	0.60	0.59	0.60	0.59	0.58	0.57	0.58	0.57	0.56	0.57	0.56	0.55	0.54				
光束	800 lm		10	0.62	0.61	0.60	0.61	0.60	0.60	0.59	0.59	0.59	0.58	0.58	0.58	0.57	0.56				

器具効率 Ft= 57.9%
 上方光束 Fu= 0.0%
 下方光束 Fd= 57.9%

配光分類

BZ-

最大取付間隔

A-A 2.06 H


B-B H

保守率	良	0.75
	中	0.70
	否	0.65

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	117		
10	152		
20	204		
30	232		
40	203		
50	147		
60	70		
70	11		
80			
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

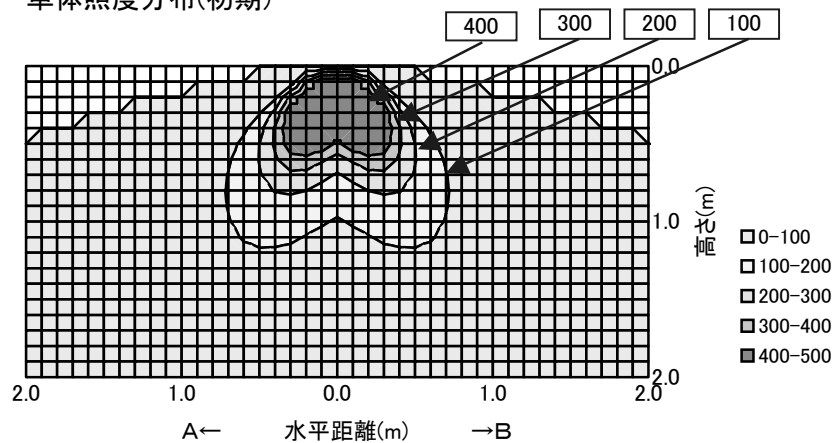

配光曲線

