



日立照明器具 照明特性

形式：FD5104A-EG			反 射 率	天井	80%			70%				50%			30%			0%													
				壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%													
				床	10%															0%											
				室指数																照明率 S/H=1.0											
姿図 			0.6	0.29	0.24	0.21	0.29	0.24	0.21	0.19	0.24	0.21	0.19	0.23	0.21	0.19	0.18														
			0.8	0.34	0.29	0.26	0.33	0.29	0.26	0.24	0.29	0.26	0.24	0.28	0.26	0.24	0.23														
			1	0.37	0.33	0.30	0.36	0.32	0.30	0.27	0.32	0.29	0.27	0.31	0.29	0.27	0.26														
			1.25	0.40	0.36	0.33	0.39	0.35	0.33	0.31	0.35	0.32	0.31	0.34	0.32	0.30	0.29														
			1.5	0.41	0.38	0.36	0.41	0.38	0.35	0.33	0.37	0.35	0.33	0.36	0.34	0.33	0.32														
			2	0.44	0.41	0.39	0.43	0.41	0.39	0.37	0.40	0.38	0.36	0.39	0.37	0.36	0.35														
			2.5	0.45	0.43	0.41	0.44	0.42	0.40	0.39	0.41	0.40	0.38	0.41	0.39	0.38	0.37														
			3	0.46	0.44	0.42	0.45	0.43	0.42	0.40	0.42	0.41	0.40	0.42	0.40	0.39	0.38														
光源			4	0.47	0.45	0.44	0.46	0.45	0.44	0.42	0.44	0.43	0.42	0.43	0.42	0.41	0.40														
品名	コンパクト形蛍光ランプ		5	0.48	0.46	0.45	0.47	0.46	0.45	0.44	0.45	0.44	0.43	0.44	0.43	0.43	0.41														
形式	FDL13EX-N		7	0.49	0.48	0.47	0.48	0.47	0.47	0.46	0.46	0.46	0.45	0.45	0.45	0.44	0.43														
光束	800 lm		10	0.49	0.49	0.48	0.49	0.48	0.48	0.47	0.47	0.47	0.47	0.46	0.46	0.46	0.44														

器具効率 Ft= 46.4%			
上方光束 Fu= 0.0%			
下方光束 Fd= 46.4%			
配光分類			
BZ-			
最大取付間隔			
A-A		1.28	H
B-B			H
保守率	良	0.75	
	中	0.70	
	否	0.65	
光 度 (cd/1000 lm)			
	A-0	B-B	C-0
0	201		
10	203		
20	191		
30	175		
40	142		
50	92		
60	52		
70	23		
80	4		
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

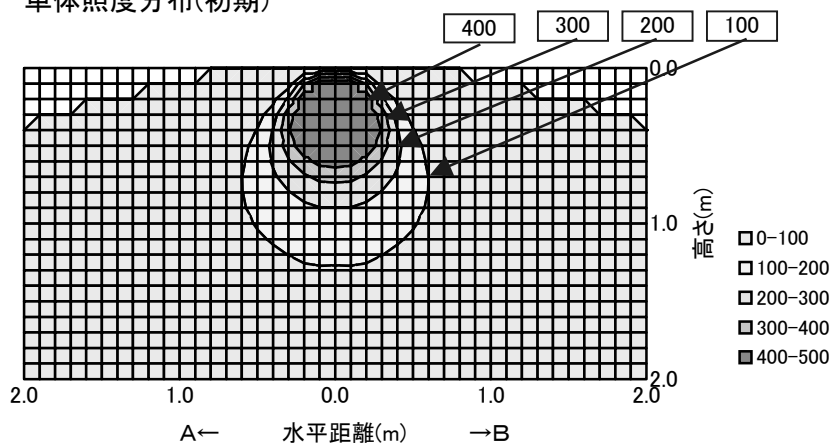

配光曲線

