



日立照明器具 照明特性

形式：HD16102-EN14			反 射 率	天井	80%			70%				50%			30%			0%
				壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
				床	10%													
				室指数	照明率 S/H=1.0													
姿図 			0.6	0.35	0.28	0.24	0.34	0.28	0.24	0.21	0.27	0.23	0.21	0.27	0.23	0.21	0.20	
			0.8	0.41	0.35	0.30	0.40	0.34	0.30	0.27	0.34	0.30	0.27	0.33	0.29	0.27	0.26	
			1	0.45	0.39	0.35	0.44	0.39	0.35	0.32	0.38	0.34	0.32	0.37	0.34	0.31	0.30	
			1.25	0.48	0.43	0.39	0.48	0.43	0.39	0.36	0.42	0.38	0.36	0.41	0.38	0.36	0.34	
			1.5	0.51	0.46	0.43	0.50	0.46	0.42	0.40	0.45	0.42	0.39	0.44	0.41	0.39	0.38	
			2	0.54	0.50	0.47	0.53	0.50	0.47	0.44	0.49	0.46	0.44	0.48	0.45	0.44	0.42	
			2.5	0.56	0.53	0.50	0.55	0.52	0.50	0.47	0.51	0.49	0.47	0.50	0.48	0.46	0.45	
			3	0.57	0.54	0.52	0.56	0.54	0.51	0.49	0.52	0.50	0.49	0.51	0.50	0.48	0.47	
光源			4	0.59	0.56	0.54	0.58	0.56	0.54	0.52	0.55	0.53	0.52	0.53	0.52	0.51	0.49	
品名	Hfコンパネ形蛍光灯ランプ		5	0.60	0.58	0.56	0.59	0.57	0.56	0.54	0.56	0.55	0.53	0.55	0.54	0.53	0.51	
形式	FHT16EX-L-A		7	0.61	0.60	0.59	0.60	0.59	0.58	0.57	0.58	0.57	0.56	0.57	0.56	0.55	0.54	
光束	1,200 lm		10	0.62	0.61	0.60	0.61	0.61	0.60	0.59	0.59	0.59	0.58	0.58	0.58	0.57	0.55	

器具効率 Ft= 58.7%			
上方光束 Fu= 0.0%			
下方光束 Fd= 58.7%			
配光分類			
BZ-			
最大取付間隔			
A-A		1.58	H
B-B			H
保守率	良	0.66	
	中	0.63	
	否	0.55	
光 度 (cd/1000 lm)			
	A-0	B-B	C-0
0	181		
10	188		
20	197		
30	206		
40	179		
50	133		
60	78		
70	34		
80	13		
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

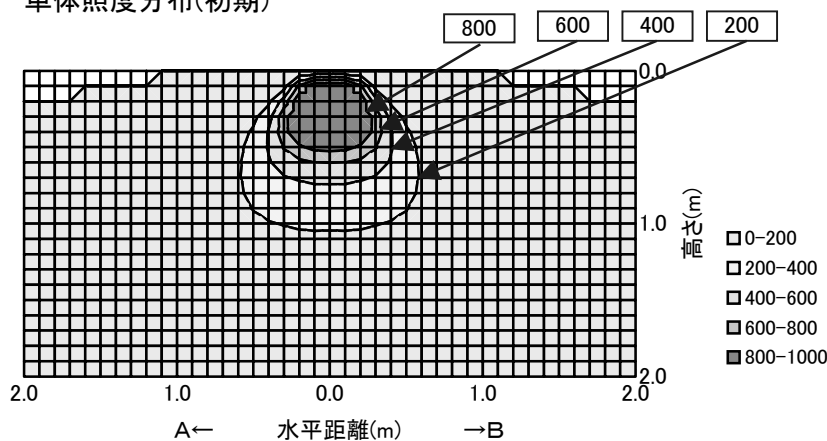

配光曲線

