



日立照明器具 照明特性

形式：HD16103-EN14		反 射 率	天井	80%			70%				50%			30%			0%		
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
姿図 		0.6	0.42	0.35	0.31	0.41	0.35	0.30	0.28	0.34	0.30	0.28	0.33	0.30	0.27	0.26			
		0.8	0.48	0.42	0.38	0.47	0.41	0.37	0.35	0.41	0.37	0.34	0.40	0.37	0.34	0.33			
		1	0.52	0.47	0.43	0.51	0.46	0.42	0.39	0.45	0.42	0.39	0.44	0.41	0.39	0.38			
		1.25	0.55	0.51	0.47	0.55	0.50	0.47	0.44	0.49	0.46	0.44	0.48	0.45	0.43	0.42			
		1.5	0.58	0.54	0.50	0.57	0.53	0.50	0.47	0.52	0.49	0.47	0.51	0.49	0.47	0.45			
		2	0.61	0.58	0.55	0.60	0.57	0.54	0.52	0.56	0.54	0.52	0.55	0.53	0.51	0.50			
		2.5	0.63	0.60	0.57	0.62	0.59	0.57	0.55	0.58	0.56	0.54	0.57	0.55	0.53	0.52			
		3	0.64	0.61	0.59	0.63	0.60	0.58	0.57	0.59	0.57	0.56	0.58	0.56	0.55	0.54			
光源		4	0.65	0.63	0.61	0.64	0.62	0.61	0.59	0.61	0.60	0.58	0.60	0.59	0.57	0.56			
品名	Hfコンパクト形蛍光灯ランプ	5	0.66	0.64	0.63	0.65	0.64	0.62	0.61	0.62	0.61	0.60	0.61	0.60	0.59	0.58			
形式	FHT16EX-L-A	7	0.67	0.66	0.65	0.67	0.66	0.65	0.64	0.64	0.63	0.63	0.63	0.62	0.61	0.60			
光束	1,200 lm	10	0.68	0.68	0.67	0.68	0.67	0.66	0.66	0.66	0.65	0.64	0.64	0.64	0.63	0.62			

器具効率 Ft= 64.2%			
上方光束 Fu= 0.1%			
下方光束 Fd= 64.0%			
配光分類			
BZ-			
最大取付間隔			
A-A		1.26	H
B-B		1.12	H
保守率	良	0.66	
	中	0.63	
	否	0.55	
光 度 (cd/1000 lm)			
	A-0	B-B	C-0
0	287	287	287
10	329	286	308
20	328	261	299
30	249	210	233
40	192	172	188
50	156	130	146
60	83	72	78
70		8	6
80		10	7
90		1	6
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

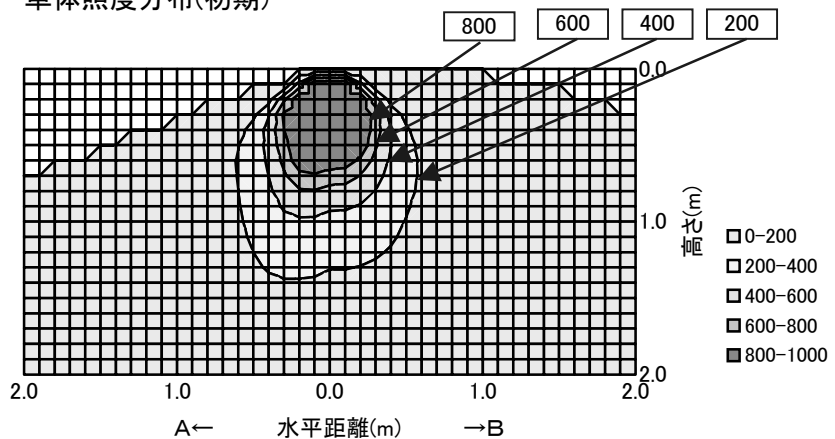

配光曲線

