


日立照明器具 照明特性

形式：HD16104-EN14		反 射 率	天井	80%			70%				50%			30%			0%		
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
姿図 		0.6	0.34	0.28	0.24	0.34	0.28	0.24	0.21	0.27	0.24	0.21	0.27	0.24	0.21	0.20			
		0.8	0.39	0.34	0.30	0.39	0.33	0.30	0.27	0.33	0.29	0.27	0.32	0.29	0.27	0.26			
		1	0.43	0.38	0.34	0.42	0.37	0.34	0.31	0.36	0.33	0.31	0.35	0.33	0.30	0.29			
		1.25	0.46	0.41	0.38	0.45	0.41	0.37	0.35	0.40	0.37	0.34	0.39	0.36	0.34	0.33			
		1.5	0.48	0.44	0.40	0.47	0.43	0.40	0.38	0.42	0.40	0.37	0.41	0.39	0.37	0.36			
		2	0.51	0.47	0.44	0.50	0.47	0.44	0.42	0.46	0.43	0.41	0.45	0.43	0.41	0.40			
		2.5	0.52	0.49	0.47	0.52	0.49	0.46	0.44	0.48	0.46	0.44	0.47	0.45	0.43	0.42			
		3	0.54	0.51	0.48	0.53	0.50	0.48	0.46	0.49	0.47	0.45	0.48	0.46	0.45	0.43			
光源		4	0.55	0.53	0.51	0.54	0.52	0.50	0.49	0.51	0.49	0.48	0.50	0.48	0.47	0.46			
品名	Hfコンパ®外形蛍光ランプ	5	0.56	0.54	0.53	0.55	0.53	0.52	0.51	0.52	0.51	0.50	0.51	0.50	0.49	0.47			
形式	FHT16EX-L-A	7	0.57	0.56	0.55	0.56	0.55	0.54	0.53	0.54	0.53	0.52	0.53	0.52	0.51	0.50			
光束	1,200 lm	10	0.58	0.57	0.56	0.57	0.57	0.56	0.55	0.55	0.55	0.54	0.54	0.54	0.53	0.51			

器具効率 Ft= 55.1%
 上方光束 Fu= 0.3%
 下方光束 Fd= 54.8%

配光分類

BZ-

最大取付間隔

A-A 1.26 H


B-B 1.18 H

保守率	良	0.66
	中	0.63
	否	0.55

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	231	231	231
10	236	224	231
20	222	210	218
30	197	182	192
40	160	141	156
50	107	92	113
60	62	58	62
70	29	34	36
80	14	21	21
90	1	5	9
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

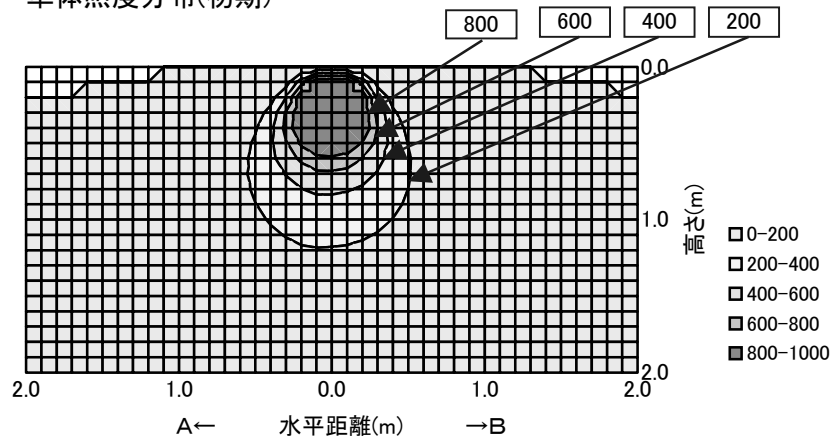

配光曲線

