


日立照明器具 照明特性

形式：HD24102-EN14			反 射 率	天井	80%			70%				50%			30%			0%		
				壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
				床	10%															0%
				室指数	照明率 S/H=1.0															
姿図 			0.6	0.34	0.28	0.24	0.33	0.27	0.24	0.21	0.27	0.23	0.21	0.26	0.23	0.21	0.20			
			0.8	0.40	0.34	0.30	0.39	0.33	0.30	0.27	0.33	0.29	0.27	0.32	0.29	0.27	0.26			
			1	0.43	0.38	0.34	0.42	0.37	0.34	0.31	0.37	0.33	0.31	0.36	0.33	0.31	0.30			
			1.25	0.46	0.42	0.38	0.46	0.41	0.38	0.35	0.40	0.37	0.35	0.39	0.37	0.35	0.33			
			1.5	0.49	0.44	0.41	0.48	0.44	0.41	0.38	0.43	0.40	0.38	0.42	0.40	0.38	0.37			
			2	0.52	0.48	0.45	0.51	0.48	0.45	0.43	0.47	0.44	0.42	0.46	0.44	0.42	0.41			
			2.5	0.53	0.50	0.48	0.52	0.50	0.47	0.45	0.49	0.47	0.45	0.48	0.46	0.44	0.43			
			3	0.54	0.52	0.49	0.54	0.51	0.49	0.47	0.50	0.48	0.47	0.49	0.47	0.46	0.45			
光源			4	0.56	0.54	0.52	0.55	0.53	0.51	0.50	0.52	0.50	0.49	0.51	0.50	0.48	0.47			
品名	Hfコンパネ形蛍光灯ランプ		5	0.57	0.55	0.54	0.56	0.54	0.53	0.52	0.53	0.52	0.51	0.52	0.51	0.50	0.49			
形式	FHT24EX-L-A		7	0.58	0.57	0.56	0.57	0.56	0.55	0.54	0.55	0.54	0.53	0.54	0.53	0.52	0.51			
光束	1,800 lm		10	0.59	0.58	0.57	0.58	0.58	0.57	0.56	0.56	0.56	0.55	0.55	0.55	0.54	0.53			

器具効率 Ft= 55.5%
 上方光束 Fu= 0.0%
 下方光束 Fd= 55.5%

配光分類

BZ-

最大取付間隔

A-A 1.48 H


B-B H

保守率	良	0.66
	中	0.63
	否	0.55

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	192		
10	200		
20	205		
30	204		
40	167		
50	117		
60	69		
70	30		
80	12		
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

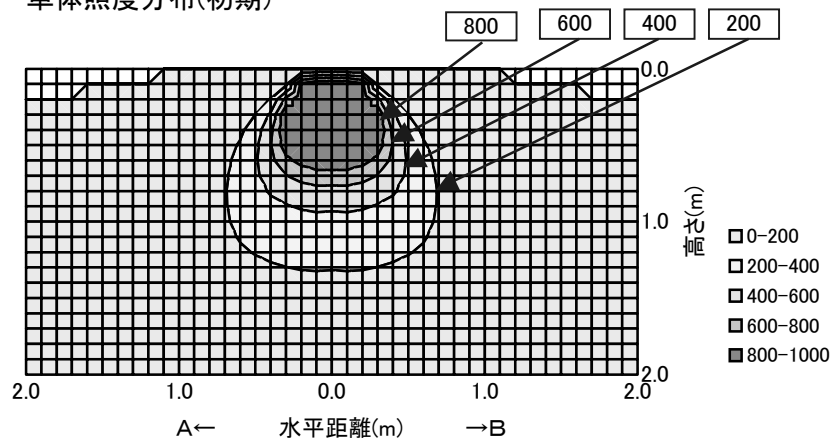

配光曲線

