


日立照明器具 照明特性

形式：HD24103-EN14			反 射 率	天井 壁 床	80%			70%				50%			30%			0%	
					70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
					10%														0%
					室指数														照明率 S/H=1.0
姿図 			0.6	0.42	0.35	0.30	0.41	0.35	0.30	0.27	0.34	0.30	0.27	0.33	0.30	0.27	0.26		
			0.8	0.49	0.42	0.38	0.48	0.42	0.37	0.34	0.41	0.37	0.34	0.40	0.37	0.34	0.33		
			1	0.53	0.47	0.43	0.52	0.46	0.42	0.39	0.45	0.42	0.39	0.45	0.41	0.39	0.38		
			1.25	0.56	0.51	0.47	0.56	0.51	0.47	0.44	0.50	0.46	0.44	0.49	0.46	0.43	0.42		
			1.5	0.59	0.55	0.51	0.58	0.54	0.51	0.48	0.53	0.50	0.47	0.52	0.49	0.47	0.46		
			2	0.62	0.59	0.56	0.61	0.58	0.55	0.53	0.57	0.54	0.52	0.56	0.54	0.52	0.50		
			2.5	0.64	0.61	0.58	0.63	0.60	0.58	0.56	0.59	0.57	0.55	0.58	0.56	0.54	0.53		
			3	0.65	0.62	0.60	0.64	0.62	0.60	0.58	0.60	0.59	0.57	0.59	0.58	0.56	0.54		
光源			4	0.67	0.65	0.63	0.66	0.64	0.62	0.60	0.62	0.61	0.59	0.61	0.60	0.59	0.57		
品名	Hfコンパクト形蛍光ランプ		5	0.68	0.66	0.64	0.67	0.65	0.64	0.62	0.64	0.63	0.61	0.62	0.61	0.60	0.59		
形式	FHT24EX-L-A		7	0.69	0.68	0.67	0.68	0.67	0.66	0.65	0.66	0.65	0.64	0.64	0.64	0.63	0.61		
光束	1,800 lm		10	0.70	0.69	0.69	0.69	0.69	0.68	0.67	0.67	0.67	0.66	0.66	0.65	0.65	0.63		

器具効率 Ft= 66.0%
 上方光束 Fu= 0.2%
 下方光束 Fd= 65.8%

配光分類

BZ-

最大取付間隔

A-A 1.28 H


B-B 1.18 H

保守率	良	0.66
	中	0.63
	否	0.55

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	265	265	265
10	314	271	298
20	325	250	296
30	233	207	231
40	192	192	188
50	158	147	155
60	102	76	88
70	3	11	8
80		11	6
90		7	7
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

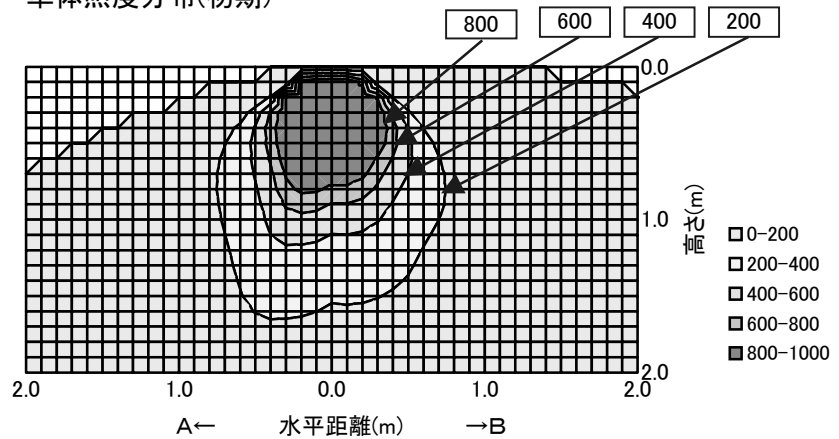

配光曲線

