


日立照明器具 照明特性

形式：HD24104-EN14			反 射 率	天井 壁 床 室指数	80%			70%				50%			30%			0%	
					70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
					10%														0%
					照明率 S/H=1.0														
姿図 			0.6	0.36	0.29	0.25	0.35	0.29	0.25	0.22	0.28	0.25	0.22	0.28	0.25	0.22	0.21		
			0.8	0.41	0.35	0.31	0.41	0.35	0.31	0.28	0.34	0.31	0.28	0.33	0.30	0.28	0.27		
			1	0.45	0.39	0.35	0.44	0.39	0.35	0.32	0.38	0.35	0.32	0.37	0.34	0.32	0.31		
			1.25	0.48	0.43	0.39	0.47	0.43	0.39	0.36	0.42	0.38	0.36	0.41	0.38	0.36	0.34		
			1.5	0.50	0.46	0.42	0.49	0.45	0.42	0.39	0.44	0.41	0.39	0.43	0.41	0.39	0.37		
			2	0.53	0.50	0.47	0.52	0.49	0.46	0.44	0.48	0.45	0.43	0.47	0.45	0.43	0.41		
			2.5	0.55	0.52	0.49	0.54	0.51	0.49	0.46	0.50	0.48	0.46	0.49	0.47	0.45	0.44		
			3	0.56	0.53	0.51	0.55	0.53	0.50	0.48	0.51	0.49	0.48	0.50	0.49	0.47	0.46		
光源			4	0.58	0.55	0.53	0.57	0.55	0.53	0.51	0.53	0.52	0.50	0.52	0.51	0.50	0.48		
品名	Hfコンパクト形蛍光ランプ		5	0.59	0.57	0.55	0.58	0.56	0.55	0.53	0.55	0.53	0.52	0.54	0.52	0.51	0.50		
形式	FHT24EX-L-A		7	0.60	0.59	0.57	0.59	0.58	0.57	0.56	0.57	0.56	0.55	0.55	0.55	0.54	0.52		
光束	1,800 lm		10	0.61	0.60	0.59	0.60	0.59	0.59	0.58	0.58	0.57	0.57	0.57	0.56	0.56	0.54		

器具効率 Ft= 57.8%
 上方光束 Fu= 0.3%
 下方光束 Fd= 57.5%

配光分類

BZ-

最大取付間隔

A-A 1.28 H


B-B 1.18 H

保守率	良	0.66
	中	0.63
	否	0.55

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	242	242	242
10	248	237	242
20	233	218	228
30	206	189	199
40	173	150	162
50	114	104	115
60	63	62	68
70	31	35	38
80	13	22	21
90	1	6	8
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

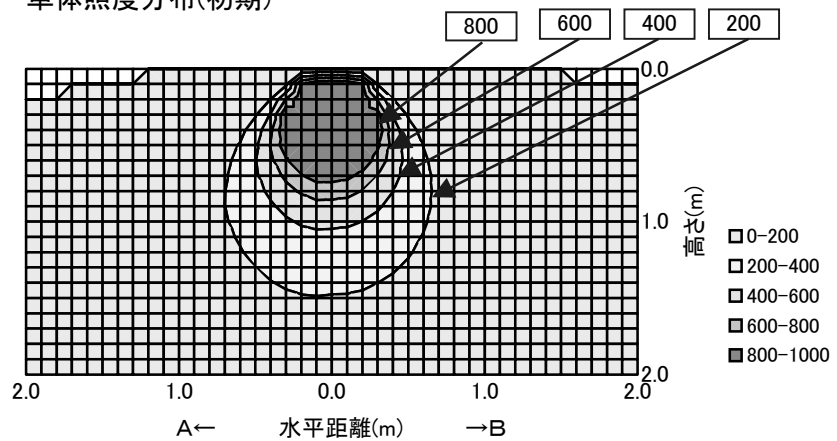

配光曲線

