


日立照明器具 照明特性

形式：HD3101-EX200			反 射 率	天井	80%			70%				50%			30%			0%
<連続調光形>				壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
				床	10%													
				室指数	照明率 S/H=1.0													
姿図 			0.6	0.35	0.29	0.25	0.34	0.29	0.25	0.22	0.28	0.25	0.22	0.28	0.24	0.22	0.21	
			0.8	0.40	0.35	0.31	0.40	0.35	0.31	0.29	0.34	0.31	0.28	0.33	0.30	0.28	0.27	
			1	0.44	0.39	0.35	0.43	0.39	0.35	0.33	0.38	0.35	0.33	0.37	0.34	0.32	0.31	
			1.25	0.47	0.43	0.39	0.46	0.42	0.39	0.37	0.41	0.39	0.36	0.40	0.38	0.36	0.35	
			1.5	0.49	0.45	0.42	0.48	0.45	0.42	0.40	0.44	0.41	0.39	0.43	0.41	0.39	0.38	
			2	0.52	0.49	0.46	0.51	0.48	0.46	0.44	0.47	0.45	0.43	0.46	0.44	0.43	0.42	
			2.5	0.53	0.51	0.48	0.53	0.50	0.48	0.46	0.49	0.47	0.46	0.48	0.46	0.45	0.44	
			3	0.54	0.52	0.50	0.53	0.51	0.49	0.48	0.50	0.49	0.47	0.49	0.48	0.47	0.45	
光源			4	0.56	0.54	0.52	0.55	0.53	0.52	0.50	0.52	0.51	0.49	0.51	0.50	0.49	0.47	
品名	Hfコンパクト形蛍光灯ランプ		5	0.56	0.55	0.54	0.56	0.54	0.53	0.52	0.53	0.52	0.51	0.52	0.51	0.50	0.49	
形式	FHT32EX-N-A		7	0.58	0.56	0.56	0.57	0.56	0.55	0.54	0.55	0.54	0.53	0.53	0.53	0.52	0.51	
光束	2,400 lm		10	0.58	0.58	0.57	0.58	0.57	0.57	0.56	0.56	0.55	0.55	0.55	0.54	0.54	0.52	

器具効率 Ft= 54.9%
 上方光束 Fu= 0.2%
 下方光束 Fd= 54.7%

配光分類

BZ-

最大取付間隔

A-A 1.50 H


B-B H

保守率	良	0.66
	中	0.63
	否	0.55

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	194		
10	226		
20	223		
30	214		
40	175		
50	118		
60	56		
70	17		
80	4		
90	4		
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

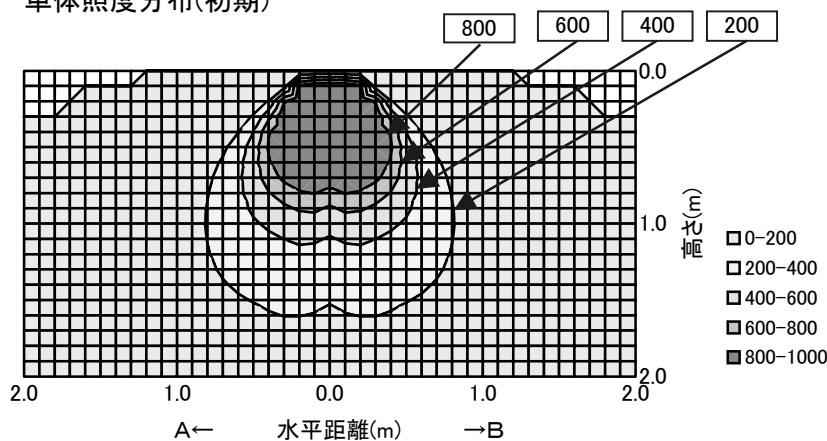

配光曲線

