



日立照明器具 照明特性

形式：HD3201-EX200			反 射 率	天井	80%			70%				50%			30%			0%
<連続調光形>				壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
				床	10%													
				室指数	照明率 S/H=1.0													
姿図 			0.6	0.26	0.20	0.17	0.26	0.20	0.17	0.14	0.20	0.16	0.14	0.19	0.16	0.14	0.13	
			0.8	0.32	0.26	0.22	0.31	0.26	0.22	0.20	0.25	0.22	0.20	0.25	0.22	0.19	0.18	
			1	0.35	0.30	0.27	0.35	0.30	0.26	0.24	0.29	0.26	0.24	0.28	0.26	0.24	0.22	
			1.25	0.38	0.34	0.31	0.38	0.34	0.30	0.28	0.33	0.30	0.28	0.32	0.29	0.27	0.26	
			1.5	0.41	0.37	0.34	0.40	0.36	0.33	0.31	0.35	0.33	0.31	0.35	0.32	0.31	0.29	
			2	0.44	0.40	0.38	0.43	0.40	0.37	0.35	0.39	0.37	0.35	0.38	0.36	0.35	0.34	
			2.5	0.45	0.42	0.40	0.44	0.42	0.40	0.38	0.41	0.39	0.38	0.40	0.38	0.37	0.36	
			3	0.46	0.44	0.42	0.45	0.43	0.41	0.40	0.42	0.41	0.39	0.41	0.40	0.39	0.38	
光源			4	0.48	0.46	0.44	0.47	0.45	0.44	0.42	0.44	0.43	0.42	0.43	0.42	0.41	0.40	
品名	Hfコンパネ形蛍光灯ランプ		5	0.48	0.47	0.46	0.48	0.46	0.45	0.44	0.45	0.44	0.43	0.44	0.43	0.43	0.41	
形式	FHT32EX-N-A		7	0.50	0.49	0.48	0.49	0.48	0.47	0.46	0.47	0.46	0.45	0.46	0.45	0.45	0.43	
光束	4,800 lm		10	0.50	0.50	0.49	0.50	0.49	0.49	0.48	0.48	0.48	0.47	0.47	0.47	0.46	0.45	

器具効率 Ft= 47.6%			
上方光束 Fu= 0.0%			
下方光束 Fd= 47.6%			
配光分類			
BZ-			
最大取付間隔			
A-A		2.24 H	
B-B		H	
保守率	良	0.66	
	中	0.63	
	否	0.55	
光 度 (cd/1000 lm)			
	A-0	B-B	C-0
0	81		
10	93		
20	121		
30	146		
40	164		
50	130		
60	81		
70	27		
80	2		
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

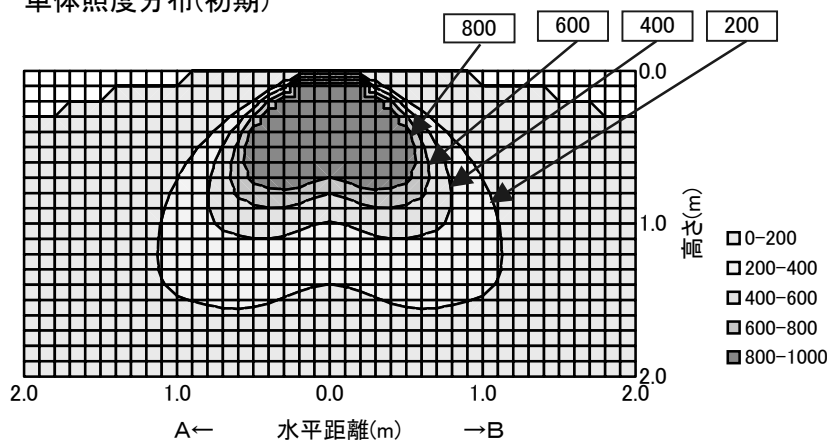

配光曲線

