



# 日立照明器具 照明特性

| 形式：HD4101-EX200                                                                                            |               |  | 反<br>射<br>率 | 天井   | 80%         |      |      | 70%  |      |      |      | 50%  |      |      | 30%  |      |      | 0% |
|------------------------------------------------------------------------------------------------------------|---------------|--|-------------|------|-------------|------|------|------|------|------|------|------|------|------|------|------|------|----|
| <連続調光形>                                                                                                    |               |  |             | 壁    | 70%         | 50%  | 30%  | 70%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 0% |
|                                                                                                            |               |  |             | 床    | 10%         |      |      |      |      |      |      |      |      |      |      |      |      |    |
|                                                                                                            |               |  |             | 室指数  | 照明率 S/H=1.0 |      |      |      |      |      |      |      |      |      |      |      |      |    |
| <div>姿図</div> <div></div> |               |  | 0.6         | 0.36 | 0.30        | 0.26 | 0.35 | 0.30 | 0.26 | 0.23 | 0.29 | 0.26 | 0.23 | 0.29 | 0.26 | 0.23 | 0.22 |    |
|                                                                                                            |               |  | 0.8         | 0.42 | 0.36        | 0.32 | 0.41 | 0.36 | 0.32 | 0.30 | 0.35 | 0.32 | 0.29 | 0.34 | 0.31 | 0.29 | 0.28 |    |
|                                                                                                            |               |  | 1           | 0.45 | 0.40        | 0.37 | 0.44 | 0.40 | 0.36 | 0.34 | 0.39 | 0.36 | 0.34 | 0.38 | 0.36 | 0.33 | 0.32 |    |
|                                                                                                            |               |  | 1.25        | 0.48 | 0.44        | 0.41 | 0.47 | 0.43 | 0.40 | 0.38 | 0.42 | 0.40 | 0.38 | 0.42 | 0.39 | 0.37 | 0.36 |    |
|                                                                                                            |               |  | 1.5         | 0.51 | 0.47        | 0.44 | 0.50 | 0.46 | 0.43 | 0.41 | 0.45 | 0.43 | 0.41 | 0.44 | 0.42 | 0.40 | 0.39 |    |
|                                                                                                            |               |  | 2           | 0.53 | 0.50        | 0.48 | 0.53 | 0.50 | 0.47 | 0.45 | 0.49 | 0.46 | 0.45 | 0.48 | 0.46 | 0.44 | 0.43 |    |
|                                                                                                            |               |  | 2.5         | 0.55 | 0.52        | 0.50 | 0.54 | 0.52 | 0.49 | 0.48 | 0.50 | 0.49 | 0.47 | 0.49 | 0.48 | 0.46 | 0.45 |    |
|                                                                                                            |               |  | 3           | 0.56 | 0.53        | 0.51 | 0.55 | 0.53 | 0.51 | 0.49 | 0.52 | 0.50 | 0.49 | 0.51 | 0.49 | 0.48 | 0.47 |    |
| 光源                                                                                                         |               |  | 4           | 0.57 | 0.55        | 0.54 | 0.56 | 0.55 | 0.53 | 0.52 | 0.53 | 0.52 | 0.51 | 0.52 | 0.51 | 0.50 | 0.49 |    |
| 品名                                                                                                         | Hfコンパネ形蛍光灯ランプ |  | 5           | 0.58 | 0.56        | 0.55 | 0.57 | 0.56 | 0.55 | 0.53 | 0.55 | 0.54 | 0.53 | 0.53 | 0.53 | 0.52 | 0.50 |    |
| 形式                                                                                                         | FHT42EX-N-A   |  | 7           | 0.59 | 0.58        | 0.57 | 0.58 | 0.57 | 0.57 | 0.56 | 0.56 | 0.55 | 0.55 | 0.55 | 0.54 | 0.54 | 0.52 |    |
| 光束                                                                                                         | 3,200 lm      |  | 10          | 0.60 | 0.59        | 0.59 | 0.59 | 0.59 | 0.58 | 0.58 | 0.57 | 0.57 | 0.57 | 0.56 | 0.56 | 0.56 | 0.54 |    |

|                 |      |      |
|-----------------|------|------|
| 器具効率 Ft= 56.4%  |      |      |
| 上方光束 Fu= 0.1%   |      |      |
| 下方光束 Fd= 56.2%  |      |      |
| 配光分類            |      |      |
| BZ-             |      |      |
| 最大取付間隔          |      |      |
| A-A             | 1.40 | H    |
| B-B             |      | H    |
| 保守率             | 良    | 0.66 |
|                 | 中    | 0.63 |
|                 | 否    | 0.55 |
| 光度 (cd/1000 lm) |      |      |
|                 | A-0  | B-B  |
| 0               | 223  |      |
| 10              | 251  |      |
| 20              | 234  |      |
| 30              | 217  |      |
| 40              | 176  |      |
| 50              | 113  |      |
| 60              | 64   |      |
| 70              | 19   |      |
| 80              | 3    |      |
| 90              | 3    |      |
| 100             |      |      |
| 110             |      |      |
| 120             |      |      |
| 130             |      |      |
| 140             |      |      |
| 150             |      |      |
| 160             |      |      |
| 170             |      |      |
| 180             |      |      |

単体照度分布(初期)

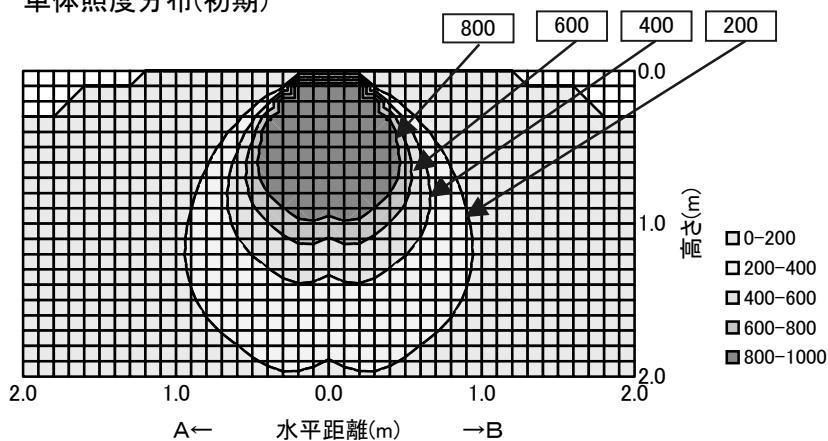

配光曲線

