


日立照明器具 照明特性

形式：HD4301-EX200		反 射 率	80%			70%				50%			30%			0%		
<連続調光形>			壁 床	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
				10%														0%
				室指数														
姿図		0.6	0.35	0.27	0.22	0.34	0.27	0.22	0.19	0.26	0.22	0.19	0.25	0.21	0.18	0.17		
		0.8	0.41	0.34	0.29	0.41	0.34	0.29	0.26	0.33	0.29	0.26	0.32	0.28	0.25	0.24		
		1	0.46	0.39	0.35	0.45	0.39	0.34	0.31	0.38	0.34	0.31	0.37	0.33	0.30	0.29		
		1.25	0.50	0.44	0.40	0.49	0.43	0.39	0.36	0.42	0.39	0.36	0.41	0.38	0.35	0.34		
		1.5	0.53	0.48	0.44	0.52	0.47	0.43	0.40	0.46	0.42	0.40	0.45	0.42	0.39	0.38		
		2	0.57	0.52	0.49	0.56	0.52	0.48	0.46	0.50	0.48	0.45	0.49	0.47	0.45	0.43		
		2.5	0.59	0.55	0.52	0.58	0.54	0.52	0.49	0.53	0.51	0.48	0.52	0.50	0.48	0.46		
		3	0.60	0.57	0.54	0.59	0.56	0.54	0.51	0.55	0.53	0.51	0.54	0.52	0.50	0.49		
光 源		4	0.62	0.59	0.57	0.61	0.59	0.57	0.55	0.57	0.56	0.54	0.56	0.55	0.53	0.52		
品名	Hfコンパクト形蛍光ランプ	5	0.63	0.61	0.59	0.62	0.60	0.59	0.57	0.59	0.58	0.56	0.58	0.56	0.55	0.54		
形式	FHT42EX-N-A	7	0.65	0.63	0.62	0.64	0.62	0.61	0.60	0.61	0.60	0.59	0.60	0.59	0.58	0.56		
光束	9,600 lm	10	0.66	0.65	0.64	0.65	0.64	0.63	0.62	0.63	0.62	0.61	0.61	0.61	0.60	0.58		

器具効率 Ft= 62.1%
 上方光束 Fu= 0.0%
 下方光束 Fd= 62.0%

配光分類

BZ-

最大取付間隔

A-A 1.94 H


B-B H

保守率	良	0.66
	中	0.63
	否	0.55

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	135		
10	141		
20	170		
30	186		
40	194		
50	157		
60	109		
70	49		
80	2		
90	1		
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

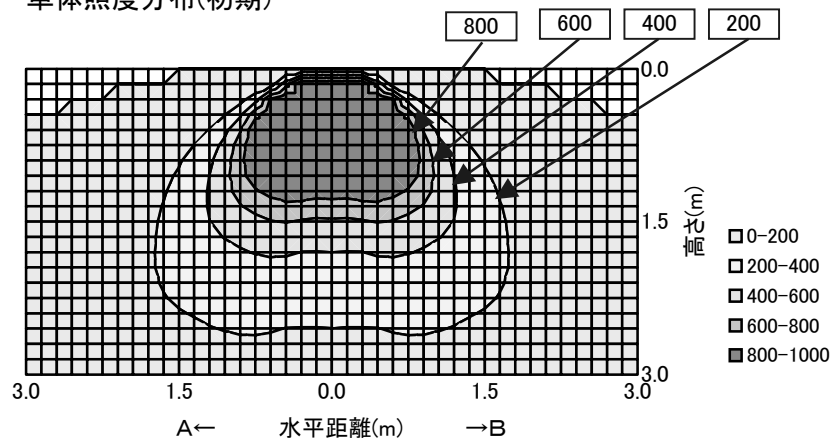

配光曲線

