


日立照明器具 照明特性

形式: HD4401-EX200 ＜連続調光形＞	反射率	天井 壁 床	80%			70%				50%			30%			0%
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			10%													0%
			室指数 照明率 S/H=1.0													
姿図 	0.6	0.39	0.29	0.23	0.38	0.29	0.23	0.19	0.28	0.23	0.19	0.27	0.23	0.19	0.18	
	0.8	0.47	0.38	0.32	0.45	0.37	0.31	0.27	0.36	0.31	0.27	0.35	0.30	0.27	0.25	
	1	0.52	0.44	0.38	0.51	0.43	0.38	0.33	0.42	0.37	0.33	0.41	0.36	0.33	0.31	
	1.25	0.57	0.49	0.44	0.55	0.49	0.43	0.39	0.47	0.43	0.39	0.46	0.42	0.39	0.37	
	1.5	0.60	0.54	0.49	0.59	0.53	0.48	0.44	0.52	0.47	0.44	0.50	0.47	0.44	0.42	
	2	0.65	0.59	0.55	0.63	0.59	0.55	0.51	0.57	0.54	0.51	0.56	0.53	0.50	0.48	
	2.5	0.67	0.63	0.59	0.66	0.62	0.58	0.55	0.60	0.57	0.55	0.59	0.56	0.54	0.52	
	3	0.69	0.65	0.62	0.68	0.64	0.61	0.58	0.63	0.60	0.58	0.61	0.59	0.57	0.55	
	4	0.71	0.68	0.65	0.70	0.67	0.65	0.63	0.66	0.64	0.62	0.64	0.62	0.61	0.59	
	5	0.73	0.70	0.68	0.72	0.69	0.67	0.65	0.68	0.66	0.64	0.66	0.65	0.63	0.61	
品名	Hfコンパネ形蛍光灯ランプ		7	0.74	0.73	0.71	0.73	0.72	0.70	0.69	0.70	0.69	0.68	0.69	0.67	0.65
形式	FHT42EX-N-A		10	0.76	0.75	0.73	0.75	0.74	0.73	0.72	0.72	0.71	0.70	0.71	0.70	0.67
光束	12,800 lm															

器具効率 Ft= 71.9%
 上方光束 Fu= 0.1%
 下方光束 Fd= 71.8%

配光分類

BZ-

最大取付間隔

A-A 2.32 H


B-B H

保守率	良	0.66
	中	0.63
	否	0.55

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	110		
10	133		
20	166		
30	198		
40	205		
50	194		
60	148		
70	65		
80	3		
90	3		
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

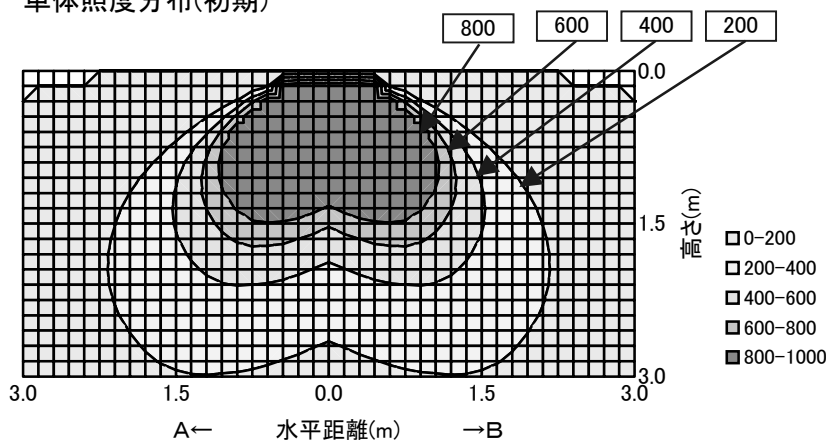

配光曲線

