


日立照明器具 照明特性

形式：HDF4101-EN12(32W)		反 射 率	80%			70%				50%			30%			0%			
姿図 			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
光源			0.6	0.35	0.29	0.25	0.34	0.29	0.25	0.22	0.28	0.25	0.22	0.28	0.24	0.22	0.21		
			0.8	0.40	0.35	0.31	0.40	0.35	0.31	0.29	0.34	0.31	0.28	0.33	0.30	0.28	0.27		
			1	0.44	0.39	0.35	0.43	0.39	0.35	0.33	0.38	0.35	0.33	0.37	0.34	0.32	0.31		
			1.25	0.47	0.43	0.39	0.46	0.42	0.39	0.37	0.41	0.39	0.36	0.40	0.38	0.36	0.35		
			1.5	0.49	0.45	0.42	0.48	0.45	0.42	0.40	0.44	0.41	0.39	0.43	0.41	0.39	0.38		
			2	0.52	0.49	0.46	0.51	0.48	0.46	0.44	0.47	0.45	0.43	0.46	0.44	0.43	0.42		
			2.5	0.53	0.51	0.48	0.53	0.50	0.48	0.46	0.49	0.47	0.46	0.48	0.46	0.45	0.44		
			3	0.54	0.52	0.50	0.53	0.51	0.49	0.48	0.50	0.49	0.47	0.49	0.48	0.47	0.45		
品名		Hfコンパネ外形蛍光灯ランプ	4	0.56	0.54	0.52	0.55	0.53	0.52	0.50	0.52	0.51	0.49	0.51	0.50	0.49	0.47		
形式		FHT32EX-N-A	5	0.56	0.55	0.54	0.56	0.54	0.53	0.52	0.53	0.52	0.51	0.52	0.51	0.50	0.49		
光束		2,400 lm	7	0.58	0.56	0.56	0.57	0.56	0.55	0.54	0.55	0.54	0.53	0.53	0.53	0.52	0.51		
			10	0.58	0.58	0.57	0.58	0.57	0.57	0.56	0.56	0.55	0.55	0.55	0.54	0.54	0.52		

器具効率 $F_t = 54.9\%$
 上方光束 $F_u = 0.2\%$
 下方光束 $F_d = 54.7\%$

配光分類

BZ-

最大取付間隔

A-A 1.50 H

B-B H

保守率


良中否

0.74
0.70
0.62

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	194		
10	226		
20	223		
30	214		
40	175		
50	118		
60	56		
70	17		
80	4		
90	4		
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

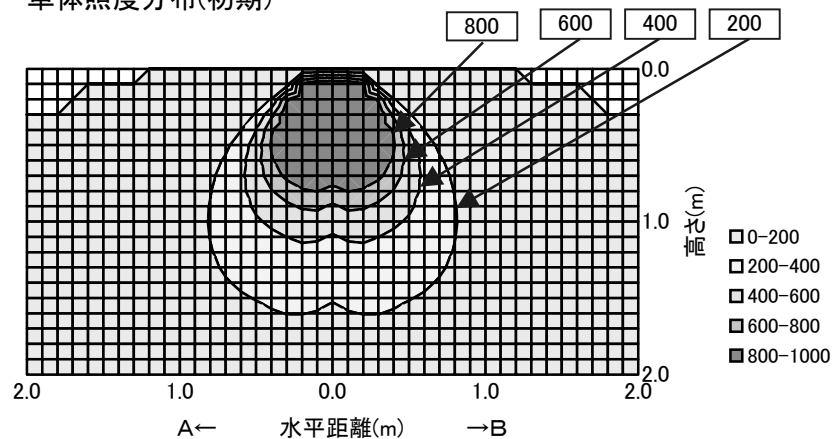

配光曲線

