



日立照明器具 照明特性

形式：HDF4101-EN12(42W)			反 射 率	天井 壁 床	80%			70%				50%			30%			0%	
					70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
					10%														0%
					室指数 照明率 S/H=1.0														
姿図 	0.6	0.36	0.30	0.26	0.35	0.30	0.26	0.23	0.29	0.26	0.23	0.29	0.26	0.23	0.22				
	0.8	0.42	0.36	0.32	0.41	0.36	0.32	0.30	0.35	0.32	0.29	0.34	0.31	0.29	0.28				
	1	0.45	0.40	0.37	0.44	0.40	0.36	0.34	0.39	0.36	0.34	0.38	0.36	0.33	0.32				
	1.25	0.48	0.44	0.41	0.47	0.43	0.40	0.38	0.42	0.40	0.38	0.42	0.39	0.37	0.36				
	1.5	0.51	0.47	0.44	0.50	0.46	0.43	0.41	0.45	0.43	0.41	0.44	0.42	0.40	0.39				
	2	0.53	0.50	0.48	0.53	0.50	0.47	0.45	0.49	0.46	0.45	0.48	0.46	0.44	0.43				
	2.5	0.55	0.52	0.50	0.54	0.52	0.49	0.48	0.50	0.49	0.47	0.49	0.48	0.46	0.45				
	3	0.56	0.53	0.51	0.55	0.53	0.51	0.49	0.52	0.50	0.49	0.51	0.49	0.48	0.47				
光源		4	0.57	0.55	0.54	0.56	0.55	0.53	0.52	0.53	0.52	0.51	0.52	0.51	0.50	0.49			
品名	Hfコンパネ形蛍光灯ランプ		5	0.58	0.56	0.55	0.57	0.56	0.55	0.53	0.55	0.54	0.53	0.53	0.52	0.50			
形式	FHT42EX-N-A		7	0.59	0.58	0.57	0.58	0.57	0.57	0.56	0.56	0.55	0.55	0.55	0.54	0.52			
光束	3,200 lm		10	0.60	0.59	0.59	0.59	0.59	0.58	0.58	0.57	0.57	0.57	0.56	0.56	0.54			

器具効率 Ft= 56.4%		
上方光束 Fu= 0.1%		
下方光束 Fd= 56.2%		
配光分類		
BZ-		
最大取付間隔		
A-A	1.40	H
B-B		H
保守率	良	0.74
	中	0.70
	否	0.62
光度 (cd/1000 lm)		
	A-0	B-B
0	223	
10	251	
20	234	
30	217	
40	176	
50	113	
60	64	
70	19	
80	3	
90	3	
100		
110		
120		
130		
140		
150		
160		
170		
180		

単体照度分布(初期)

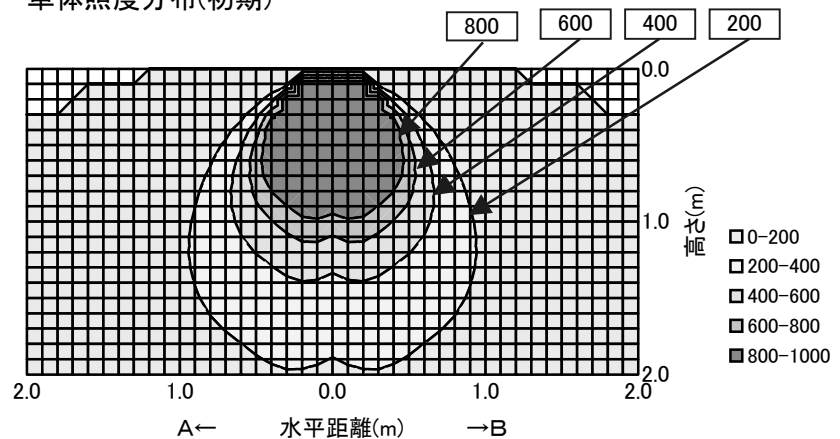

配光曲線

