



日立照明器具 照明特性

形式：HDF4201-EN(32W)		反 射 率	天井	80%			70%				50%			30%			0%		
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
姿図		0.6	0.26	0.20	0.17	0.26	0.20	0.17	0.14	0.20	0.16	0.14	0.19	0.16	0.14	0.13			
		0.8	0.32	0.26	0.22	0.31	0.26	0.22	0.20	0.25	0.22	0.20	0.25	0.22	0.19	0.18			
		1	0.35	0.30	0.27	0.35	0.30	0.26	0.24	0.29	0.26	0.24	0.28	0.26	0.24	0.22			
		1.25	0.38	0.34	0.31	0.38	0.34	0.30	0.28	0.33	0.30	0.28	0.32	0.29	0.27	0.26			
		1.5	0.41	0.37	0.34	0.40	0.36	0.33	0.31	0.35	0.33	0.31	0.35	0.32	0.31	0.29			
		2	0.44	0.40	0.38	0.43	0.40	0.37	0.35	0.39	0.37	0.35	0.38	0.36	0.35	0.34			
		2.5	0.45	0.42	0.40	0.44	0.42	0.40	0.38	0.41	0.39	0.38	0.40	0.38	0.37	0.36			
		3	0.46	0.44	0.42	0.45	0.43	0.41	0.40	0.42	0.41	0.39	0.41	0.40	0.39	0.38			
光源		4	0.48	0.46	0.44	0.47	0.45	0.44	0.42	0.44	0.43	0.42	0.43	0.42	0.41	0.40			
品名	Hfコンパネ形蛍光灯ランプ	5	0.48	0.47	0.46	0.48	0.46	0.45	0.44	0.45	0.44	0.43	0.44	0.43	0.43	0.41			
形式	FHT32EX-N-A	7	0.50	0.49	0.48	0.49	0.48	0.47	0.46	0.47	0.46	0.45	0.46	0.45	0.45	0.43			
光束	4,800 lm	10	0.50	0.50	0.49	0.50	0.49	0.49	0.48	0.48	0.48	0.47	0.47	0.47	0.46	0.45			

器具効率 Ft= 47.6%		
上方光束 Fu= 0.0%		
下方光束 Fd= 47.6%		
配光分類 BZ-		
最大取付間隔		
A-A	2.24	H
B-B		H
保守率	良	0.74
	中	0.70
	否	0.62
光度 (cd/1000 lm)		
	A-0	B-B
0	81	
10	93	
20	121	
30	146	
40	164	
50	130	
60	81	
70	27	
80	2	
90		
100		
110		
120		
130		
140		
150		
160		
170		
180		

単体照度分布(初期)

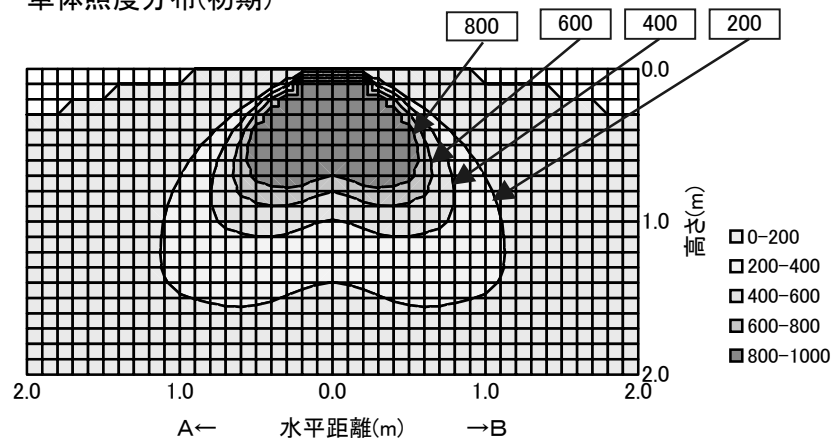

配光曲線

