


日立照明器具 照明特性

形式：HDF4202-EN14(32W)		反 射 率	天井	80%			70%				50%			30%			0%		
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
姿図 		0.6	0.30	0.24	0.21	0.29	0.24	0.20	0.18	0.23	0.20	0.18	0.23	0.20	0.18	0.17			
		0.8	0.35	0.30	0.26	0.34	0.29	0.26	0.23	0.29	0.26	0.23	0.28	0.25	0.23	0.22			
		1	0.38	0.33	0.30	0.38	0.33	0.30	0.27	0.32	0.29	0.27	0.32	0.29	0.27	0.26			
		1.25	0.41	0.37	0.34	0.40	0.37	0.34	0.31	0.36	0.33	0.31	0.35	0.33	0.31	0.30			
		1.5	0.43	0.40	0.37	0.43	0.39	0.36	0.34	0.38	0.36	0.34	0.37	0.35	0.34	0.33			
		2	0.46	0.43	0.41	0.45	0.43	0.40	0.38	0.42	0.40	0.38	0.41	0.39	0.37	0.36			
		2.5	0.47	0.45	0.43	0.47	0.44	0.42	0.41	0.43	0.42	0.40	0.42	0.41	0.40	0.39			
		3	0.48	0.46	0.44	0.48	0.46	0.44	0.42	0.45	0.43	0.42	0.44	0.42	0.41	0.40			
光源		4	0.50	0.48	0.46	0.49	0.47	0.46	0.45	0.46	0.45	0.44	0.45	0.44	0.43	0.42			
品名	Hfコンパクト形蛍光ランプ	5	0.51	0.49	0.48	0.50	0.49	0.47	0.46	0.48	0.46	0.46	0.46	0.46	0.45	0.44			
形式	FHT32EX-N-A	7	0.52	0.51	0.50	0.51	0.50	0.49	0.48	0.49	0.48	0.48	0.48	0.47	0.47	0.45			
光束	4,800 lm	10	0.52	0.52	0.51	0.52	0.51	0.51	0.50	0.50	0.50	0.49	0.49	0.49	0.48	0.47			

器具効率 Ft= 49.4%

上方光束 Fu= 0.1%

下方光束 Fd= 49.3%

配光分類

BZ-

最大取付間隔

A-A 1.62 H


B-B 1.34 H

保守率	良	中	否
	0.74	0.70	0.62

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	145	145	145
10	193	154	179
20	201	159	185
30	180	146	174
40	152	97	143
50	143	86	121
60	104	69	92
70	16	8	17
80	2	2	3
90	2	1	2
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

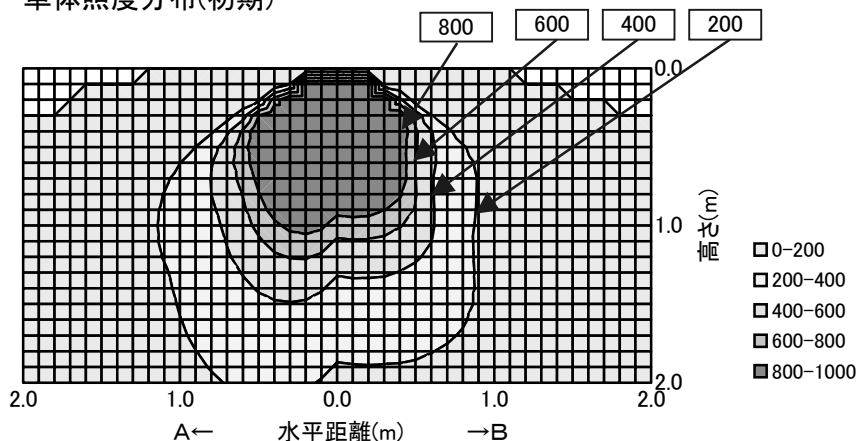

配光曲線

