

日立照明器具 照明特性

形式：HDF4202-EN14(42W)		反 射 率	天井	80%			70%				50%			30%			0%	
姿図 			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
光源	0.6	0.28	0.23	0.19	0.28	0.22	0.19	0.17	0.22	0.19	0.17	0.21	0.19	0.17	0.16			
	0.8	0.33	0.28	0.24	0.32	0.28	0.24	0.22	0.27	0.24	0.22	0.26	0.24	0.22	0.21			
	1	0.36	0.32	0.28	0.36	0.31	0.28	0.26	0.30	0.28	0.26	0.30	0.27	0.25	0.24			
	1.25	0.39	0.35	0.32	0.38	0.35	0.32	0.29	0.34	0.31	0.29	0.33	0.31	0.29	0.28			
	1.5	0.41	0.37	0.35	0.40	0.37	0.34	0.32	0.36	0.34	0.32	0.35	0.33	0.32	0.31			
	2	0.44	0.41	0.38	0.43	0.40	0.38	0.36	0.39	0.37	0.36	0.38	0.37	0.35	0.34			
	2.5	0.45	0.43	0.41	0.44	0.42	0.40	0.38	0.41	0.39	0.38	0.40	0.39	0.38	0.36			
	3	0.46	0.44	0.42	0.45	0.43	0.42	0.40	0.42	0.41	0.40	0.41	0.40	0.39	0.38			
4	0.47	0.46	0.44	0.47	0.45	0.44	0.42	0.44	0.43	0.42	0.43	0.42	0.41	0.40				
品名	Hfコンパ'外形蛍光ランプ	5	0.48	0.47	0.45	0.47	0.46	0.45	0.44	0.45	0.44	0.43	0.44	0.43	0.43	0.41		
形式	FHT42EX-N-A	7	0.49	0.48	0.47	0.48	0.48	0.47	0.46	0.47	0.46	0.45	0.46	0.45	0.44	0.43		
光束	6,400 lm	10	0.50	0.49	0.49	0.49	0.49	0.48	0.48	0.48	0.47	0.47	0.47	0.46	0.46	0.45		

器具効率 Ft= 47.0%

上方光束 Fu= 0.1%

下方光束 Fd= 46.9%

配光分類

BZ-

最大取付間隔

A-A 1.70 H


B-B 1.40 H

保守率	良	中	否
	0.74	0.70	0.62

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	130	130	130
10	175	138	161
20	186	141	172
30	170	134	165
40	146	102	135
50	134	89	113
60	97	69	86
70	20	11	19
80	2	3	3
90	1	2	2
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

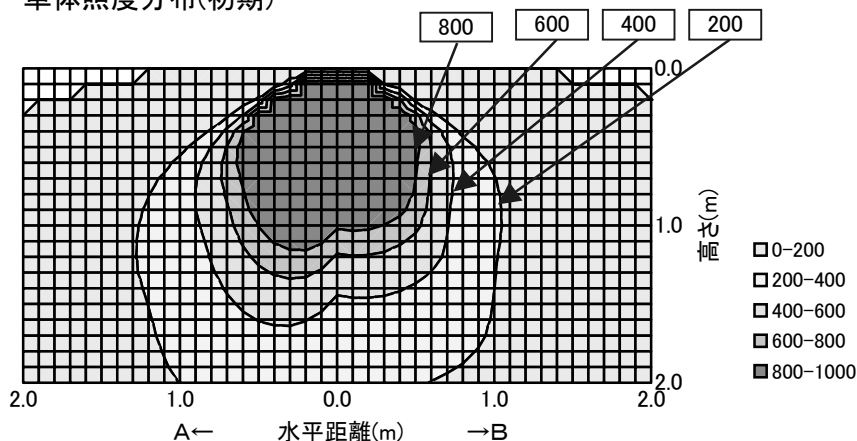

配光曲線

