



日立照明器具 照明特性

形式：HDF4301-EN(32W)			反 射 率	天井	80%			70%				50%			30%			0%			
				壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
				床	10%																0%
				室指数	照明率 S/H=1.0																
姿図			0.6	0.35	0.27	0.22	0.34	0.26	0.21	0.18	0.26	0.21	0.18	0.25	0.21	0.18	0.16				
			0.8	0.42	0.35	0.29	0.41	0.34	0.29	0.25	0.33	0.29	0.25	0.32	0.28	0.25	0.24				
			1	0.47	0.40	0.35	0.46	0.39	0.35	0.31	0.38	0.34	0.31	0.37	0.33	0.30	0.29				
			1.25	0.51	0.45	0.40	0.50	0.44	0.40	0.36	0.43	0.39	0.36	0.42	0.39	0.36	0.34				
			1.5	0.55	0.49	0.45	0.54	0.48	0.44	0.41	0.47	0.43	0.40	0.46	0.43	0.40	0.39				
			2	0.59	0.54	0.50	0.58	0.53	0.50	0.47	0.52	0.49	0.46	0.51	0.48	0.46	0.44				
			2.5	0.61	0.57	0.54	0.60	0.56	0.53	0.51	0.55	0.52	0.50	0.54	0.51	0.49	0.48				
			3	0.62	0.59	0.56	0.61	0.58	0.56	0.53	0.57	0.55	0.52	0.56	0.54	0.52	0.50				
光源			4	0.64	0.62	0.59	0.63	0.61	0.59	0.57	0.60	0.58	0.56	0.58	0.57	0.55	0.53				
品名	Hfコンパネ形蛍光灯ランプ		5	0.66	0.63	0.62	0.65	0.63	0.61	0.59	0.61	0.60	0.58	0.60	0.59	0.57	0.56				
形式	FHT32EX-N-A		7	0.67	0.66	0.64	0.66	0.65	0.64	0.62	0.63	0.62	0.61	0.62	0.61	0.60	0.58				
光束	7,200 lm		10	0.68	0.67	0.66	0.68	0.67	0.66	0.65	0.65	0.64	0.64	0.64	0.63	0.63	0.61				

器具効率 Ft= 64.8%			
上方光束 Fu= 0.1%			
下方光束 Fd= 64.7%			
配光分類			
BZ-			
最大取付間隔			
A-A		2.20	H
B-B			H
保守率	良	0.74	
	中	0.70	
	否	0.62	
光 度 (cd/1000 lm)			
	A-0	B-B	C-0
0	115		
10	122		
20	153		
30	180		
40	199		
50	181		
60	126		
70	48		
80	3		
90	2		
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

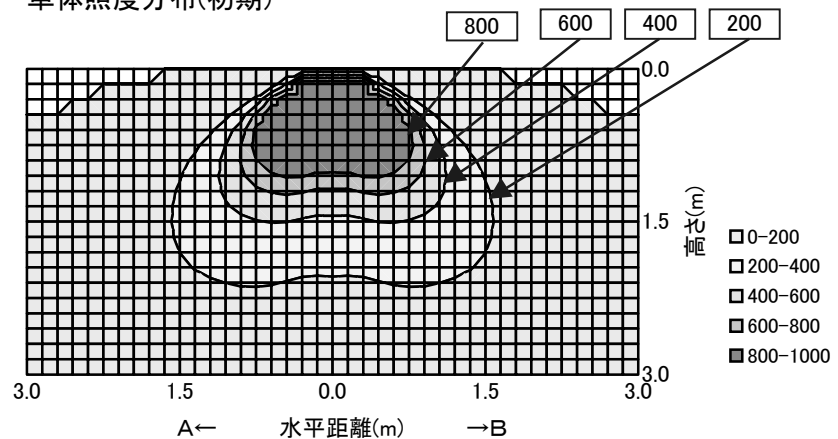

配光曲線

