

**日立照明器具 照明特性**

形式: HDF4301-EN(42W)	天井	80%			70%				50%			30%			0%
	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
	床	10%													0%
	室指数	照明率 S/H=1.0													
姿図 	0.6	0.35	0.27	0.22	0.34	0.27	0.22	0.19	0.26	0.22	0.19	0.25	0.21	0.18	0.17
	0.8	0.41	0.34	0.29	0.41	0.34	0.29	0.26	0.33	0.29	0.26	0.32	0.28	0.25	0.24
	1	0.46	0.39	0.35	0.45	0.39	0.34	0.31	0.38	0.34	0.31	0.37	0.33	0.30	0.29
	1.25	0.50	0.44	0.40	0.49	0.43	0.39	0.36	0.42	0.39	0.36	0.41	0.38	0.35	0.34
	1.5	0.53	0.48	0.44	0.52	0.47	0.43	0.40	0.46	0.42	0.40	0.45	0.42	0.39	0.38
	2	0.57	0.52	0.49	0.56	0.52	0.48	0.46	0.50	0.48	0.45	0.49	0.47	0.45	0.43
	2.5	0.59	0.55	0.52	0.58	0.54	0.52	0.49	0.53	0.51	0.48	0.52	0.50	0.48	0.46
	3	0.60	0.57	0.54	0.59	0.56	0.54	0.51	0.55	0.53	0.51	0.54	0.52	0.50	0.49
	4	0.62	0.59	0.57	0.61	0.59	0.57	0.55	0.57	0.56	0.54	0.56	0.55	0.53	0.52
	光源	5	0.63	0.61	0.59	0.62	0.60	0.59	0.57	0.59	0.58	0.56	0.58	0.56	0.55
品名: Hfコンパ外形蛍光灯ランプ	7	0.65	0.63	0.62	0.64	0.62	0.61	0.60	0.61	0.60	0.59	0.60	0.59	0.58	0.56
形式: FHT42EX-N-A	10	0.66	0.65	0.64	0.65	0.64	0.63	0.62	0.63	0.62	0.61	0.61	0.61	0.60	0.58
光束: 9,600 lm															

器具効率 Ft= 62.1%

上方光束 Fu= 0.0%


下方光束 Fd= 62.0%

配光分類  
BZ-


最大取付間隔  
A-A 1.94 H  
B-B H

保守率	良	0.74
	中	0.70
	否	0.62

単体照度分布(初期)

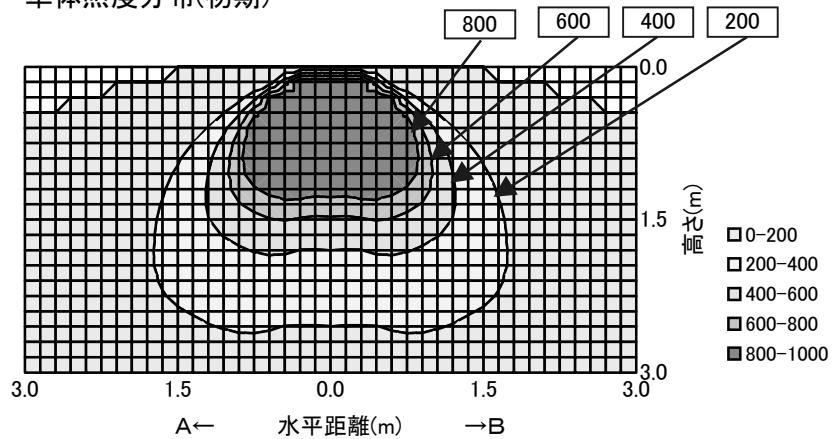

配光曲線

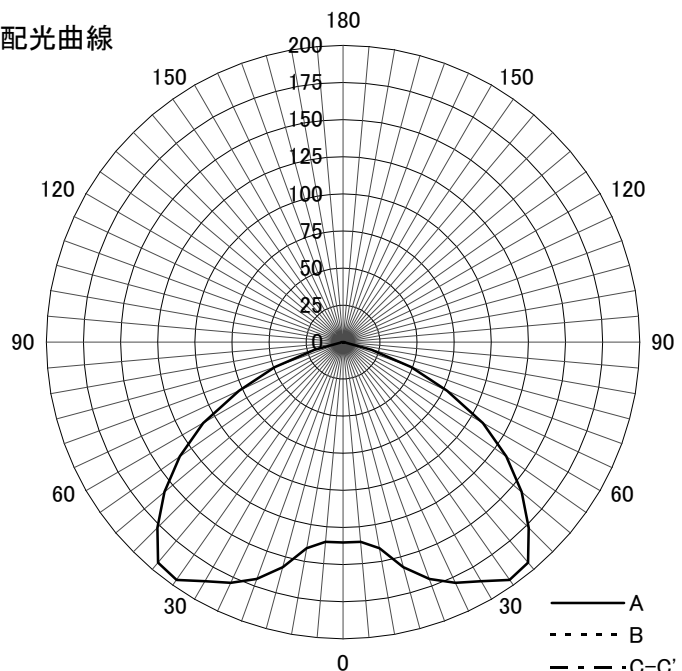

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	135		
10	141		
20	170		
30	186		
40	194		
50	157		
60	109		
70	49		
80	2		
90	1		
100			
110			
120			
130			
140			
150			
160			
170			
180			

HDF4301-EN(42W)(R1)