


日立照明器具 照明特性

形式：HDF4401-EN(32W)			反 射 率	天井	80%			70%				50%			30%			0%		
				壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
				床	10%															0%
				室指数	照明率 S/H=1.0															
姿図 			0.6	0.38	0.28	0.22	0.37	0.28	0.22	0.18	0.27	0.22	0.18	0.26	0.21	0.18	0.16			
			0.8	0.46	0.37	0.31	0.45	0.36	0.30	0.26	0.35	0.30	0.26	0.34	0.29	0.26	0.24			
			1	0.51	0.43	0.37	0.50	0.42	0.36	0.32	0.41	0.36	0.32	0.40	0.35	0.32	0.30			
			1.25	0.56	0.49	0.43	0.55	0.48	0.43	0.38	0.47	0.42	0.38	0.45	0.41	0.38	0.36			
			1.5	0.60	0.53	0.48	0.59	0.52	0.47	0.44	0.51	0.47	0.43	0.50	0.46	0.43	0.41			
			2	0.64	0.59	0.55	0.63	0.58	0.54	0.51	0.57	0.53	0.50	0.55	0.52	0.49	0.48			
			2.5	0.67	0.62	0.59	0.66	0.62	0.58	0.55	0.60	0.57	0.54	0.59	0.56	0.54	0.52			
			3	0.69	0.65	0.61	0.68	0.64	0.61	0.58	0.62	0.60	0.57	0.61	0.59	0.57	0.55			
光源			4	0.71	0.68	0.65	0.70	0.67	0.65	0.62	0.66	0.63	0.61	0.64	0.62	0.60	0.59			
品名	Hfコンパネ形蛍光灯ランプ		5	0.73	0.70	0.68	0.72	0.69	0.67	0.65	0.68	0.66	0.64	0.66	0.65	0.63	0.61			
形式	FHT32EX-N-A		7	0.74	0.73	0.71	0.73	0.72	0.70	0.69	0.70	0.69	0.68	0.69	0.68	0.67	0.65			
光束	9,600 lm		10	0.76	0.75	0.73	0.75	0.74	0.73	0.72	0.72	0.71	0.70	0.71	0.70	0.69	0.67			

器具効率 $F_t = 72.0\%$
 上方光束 $F_u = 0.0\%$
 下方光束 $F_d = 72.0\%$

配光分類

BZ-

最大取付間隔

A-A 2.60 H

B-B H

保守率


良
中
否

0.74
0.70
0.62

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	91		
10	112		
20	154		
30	182		
40	198		
50	204		
60	162		
70	70		
80	2		
90	1		
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

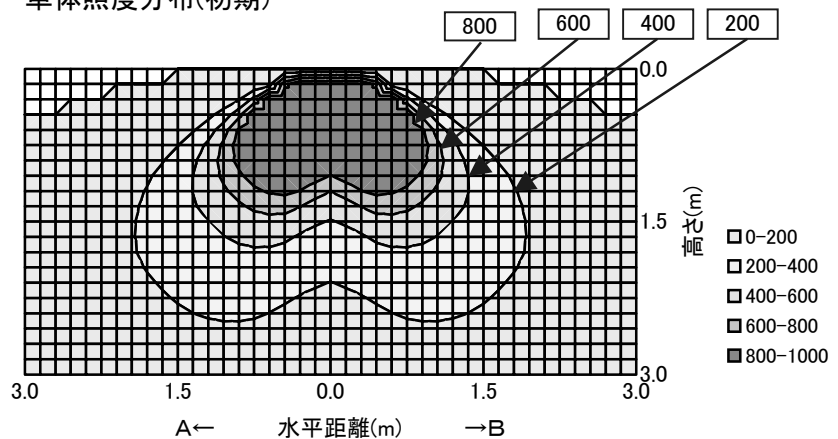

配光曲線

