


日立照明器具 照明特性

形式：HDF4401-EN(42W)			反 射 率	天井	80%			70%				50%			30%			0%		
				壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
				床	10%															0%
				室指数	照明率 S/H=1.0															
姿図 			0.6	0.39	0.29	0.23	0.38	0.29	0.23	0.19	0.28	0.23	0.19	0.27	0.23	0.19	0.18			
			0.8	0.47	0.38	0.32	0.45	0.37	0.31	0.27	0.36	0.31	0.27	0.35	0.30	0.27	0.25			
			1	0.52	0.44	0.38	0.51	0.43	0.38	0.33	0.42	0.37	0.33	0.41	0.36	0.33	0.31			
			1.25	0.57	0.49	0.44	0.55	0.49	0.43	0.39	0.47	0.43	0.39	0.46	0.42	0.39	0.37			
			1.5	0.60	0.54	0.49	0.59	0.53	0.48	0.44	0.52	0.47	0.44	0.50	0.47	0.44	0.42			
			2	0.65	0.59	0.55	0.63	0.59	0.55	0.51	0.57	0.54	0.51	0.56	0.53	0.50	0.48			
			2.5	0.67	0.63	0.59	0.66	0.62	0.58	0.55	0.60	0.57	0.55	0.59	0.56	0.54	0.52			
			3	0.69	0.65	0.62	0.68	0.64	0.61	0.58	0.63	0.60	0.58	0.61	0.59	0.57	0.55			
光源			4	0.71	0.68	0.65	0.70	0.67	0.65	0.63	0.66	0.64	0.62	0.64	0.62	0.61	0.59			
品名	Hfコンパネ形蛍光灯ランプ		5	0.73	0.70	0.68	0.72	0.69	0.67	0.65	0.68	0.66	0.64	0.66	0.65	0.63	0.61			
形式	FHT42EX-N-A		7	0.74	0.73	0.71	0.73	0.72	0.70	0.69	0.70	0.69	0.68	0.69	0.68	0.67	0.65			
光束	12,800 lm		10	0.76	0.75	0.73	0.75	0.74	0.73	0.72	0.72	0.71	0.70	0.71	0.70	0.69	0.67			

器具効率 $F_t = 71.9\%$
 上方光束 $F_u = 0.1\%$
 下方光束 $F_d = 71.8\%$

配光分類

BZ-

最大取付間隔

A-A 2.32 H

B-B H

保守率


良
中
否

0.74
0.70
0.62

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	110		
10	133		
20	166		
30	198		
40	205		
50	194		
60	148		
70	65		
80	3		
90	3		
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

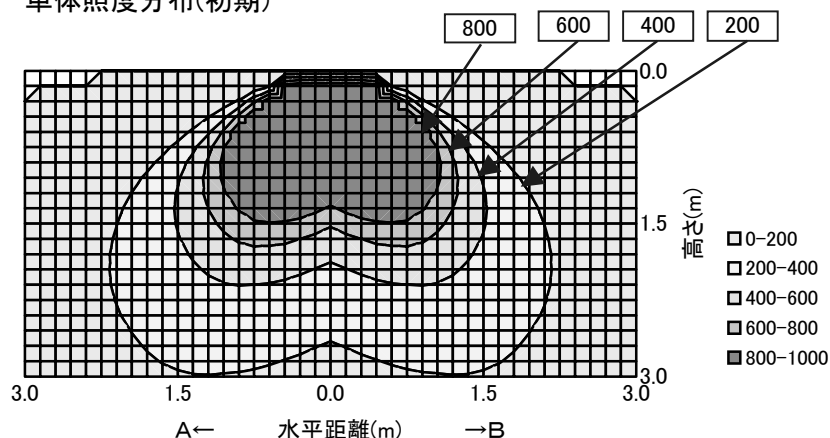

配光曲線

