


日立照明器具 照明特性

形式： HNG4260A-MEN14		反 射 率	80%			70%				50%			30%			0%	
< 定格出力形 >			天井	壁	床	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			10%														0%
			室指数 照明率 S/H=1.0														
姿図 		0.6	0.35	0.28	0.23	0.34	0.27	0.23	0.20	0.27	0.23	0.20	0.26	0.22	0.20	0.19	
		0.8	0.41	0.34	0.29	0.40	0.33	0.29	0.26	0.33	0.29	0.26	0.32	0.28	0.26	0.25	
		1	0.44	0.38	0.34	0.44	0.38	0.34	0.31	0.37	0.33	0.30	0.36	0.33	0.30	0.29	
		1.25	0.48	0.43	0.38	0.47	0.42	0.38	0.35	0.41	0.38	0.35	0.40	0.37	0.35	0.33	
		1.5	0.51	0.46	0.42	0.50	0.45	0.42	0.39	0.44	0.41	0.38	0.43	0.40	0.38	0.37	
		2	0.54	0.50	0.47	0.53	0.49	0.46	0.44	0.48	0.46	0.43	0.47	0.45	0.43	0.41	
		2.5	0.56	0.53	0.50	0.55	0.52	0.49	0.47	0.51	0.48	0.46	0.49	0.48	0.46	0.44	
		3	0.57	0.54	0.52	0.56	0.54	0.51	0.49	0.52	0.50	0.48	0.51	0.49	0.48	0.46	
光 源		4	0.59	0.57	0.54	0.58	0.56	0.54	0.52	0.55	0.53	0.51	0.53	0.52	0.51	0.49	
品名	Hf蛍光ランプ ^o	5	0.60	0.58	0.56	0.59	0.57	0.56	0.54	0.56	0.55	0.53	0.55	0.54	0.53	0.51	
形式	FHF32EX-N-H	7	0.61	0.60	0.59	0.61	0.59	0.58	0.57	0.58	0.57	0.56	0.57	0.56	0.55	0.54	
光束	7,040 lm	10	0.62	0.62	0.61	0.62	0.61	0.60	0.59	0.60	0.59	0.58	0.58	0.58	0.57	0.56	

器具効率 Ft= 59.1%			
上方光束 Fu= 0.0%			
下方光束 Fd= 59.1%			
配光分類			
BZ-			
最大取付間隔			
A-A		1.36	H
B-B		1.32	H
保守率	良	0.69	
	中	0.65	
	否	0.61	
光 度 (cd/1000 lm)			
	A-0	B-B	C-0
0	201	201	201
10	199	200	199
20	194	191	191
30	184	177	179
40	165	156	162
50	136	131	135
60	93	100	100
70	8	64	55
80		25	11
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

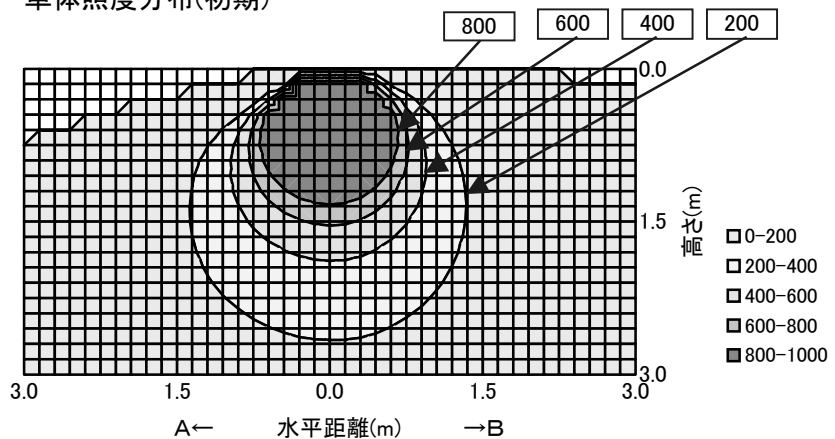

配光曲線

