

日立照明器具 照明特性

形式： HNJ4105-MEU14		反 射 率	天井			80%				70%				50%			30%			0%
<高出力形>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
			床	10%															0%	
		室指数	照明率 S/H=1.0																	
		0.6	0.38	0.28	0.21	0.36	0.26	0.20	0.16	0.24	0.19	0.15	0.21	0.17	0.14	0.11				
		0.8	0.44	0.34	0.28	0.42	0.33	0.26	0.22	0.29	0.24	0.20	0.26	0.22	0.18	0.15				
		1	0.49	0.39	0.32	0.46	0.37	0.31	0.26	0.34	0.28	0.24	0.30	0.26	0.22	0.18				
		1.25	0.54	0.44	0.38	0.50	0.42	0.36	0.31	0.38	0.33	0.28	0.34	0.30	0.26	0.21				
		1.5	0.57	0.48	0.42	0.54	0.46	0.40	0.35	0.41	0.36	0.32	0.37	0.33	0.29	0.24				
		2	0.61	0.54	0.48	0.58	0.51	0.46	0.41	0.46	0.42	0.38	0.42	0.38	0.35	0.29				
		2.5	0.64	0.58	0.52	0.61	0.55	0.50	0.46	0.50	0.46	0.42	0.45	0.41	0.38	0.32				
		3	0.67	0.61	0.55	0.63	0.58	0.53	0.49	0.52	0.48	0.45	0.47	0.44	0.41	0.34				
光源		4	0.69	0.64	0.60	0.66	0.61	0.57	0.54	0.56	0.52	0.49	0.50	0.48	0.45	0.38				
品名	Hf蛍光ランプ	5	0.71	0.67	0.63	0.68	0.64	0.60	0.57	0.58	0.55	0.53	0.53	0.50	0.48	0.41				
形式	FHF32EX-N-H	7	0.74	0.70	0.67	0.70	0.67	0.64	0.62	0.61	0.59	0.57	0.56	0.54	0.52	0.44				
光束	4,950 lm	10	0.76	0.73	0.71	0.72	0.70	0.68	0.66	0.64	0.62	0.61	0.58	0.57	0.55	0.48				

器具効率 $F_t = 78.6\%$
 上方光束 $F_u = 21.3\%$
 下方光束 $F_d = 57.2\%$

配光分類

BZ-

最大取付間隔

A-A 1.66 H


B-B 1.22 H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	115	115	115	115	115
10	180	109	152	57	69
20	202	105	178	14	31
30	228	94	188		4
40	250	80	197		
50	260	66	203		
60	263	48	201		
70	254	29	191		
80	244	12	173		
90	231		158		
100	216	1	143		
110	193	1	117		
120	145		72		
130	83		28		
140	36		4		
150	2				
160					
170	1		1		
180					

単体照度分布(初期)

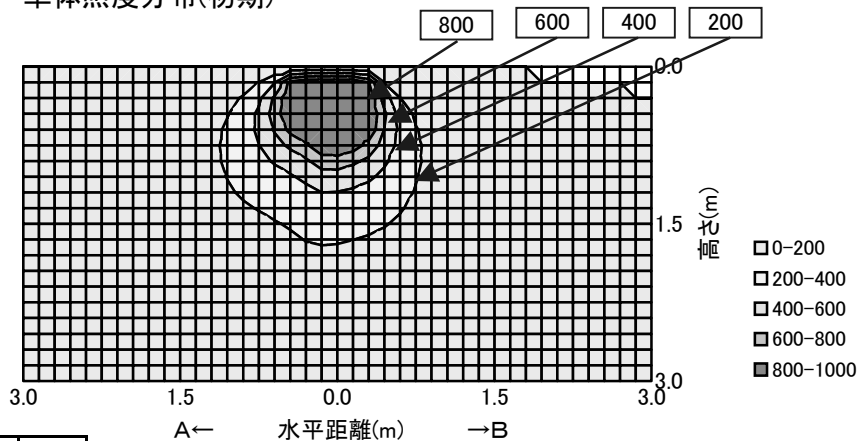

配光曲線

