

日立照明器具 照明特性

形式：HNJ4105-PKU14		反 射 率	天井			70%				50%			30%			0%			
<高出力形> <初期照度補正機能付>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
姿図		0.6	0.38	0.28	0.21	0.36	0.26	0.20	0.16	0.24	0.19	0.15	0.21	0.17	0.14	0.11			
		0.8	0.44	0.34	0.28	0.42	0.33	0.26	0.22	0.29	0.24	0.20	0.26	0.22	0.18	0.15			
		1	0.49	0.39	0.32	0.46	0.37	0.31	0.26	0.34	0.28	0.24	0.30	0.26	0.22	0.18			
		1.25	0.54	0.44	0.38	0.50	0.42	0.36	0.31	0.38	0.33	0.28	0.34	0.30	0.26	0.21			
		1.5	0.57	0.48	0.42	0.54	0.46	0.40	0.35	0.41	0.36	0.32	0.37	0.33	0.29	0.24			
		2	0.61	0.54	0.48	0.58	0.51	0.46	0.41	0.46	0.42	0.38	0.42	0.38	0.35	0.29			
		2.5	0.64	0.58	0.52	0.61	0.55	0.50	0.46	0.50	0.46	0.42	0.45	0.41	0.38	0.32			
		3	0.67	0.61	0.55	0.63	0.58	0.53	0.49	0.52	0.48	0.45	0.47	0.44	0.41	0.34			
光 源		4	0.69	0.64	0.60	0.66	0.61	0.57	0.54	0.56	0.52	0.49	0.50	0.48	0.45	0.38			
品名	Hf蛍光ランプ ^o	5	0.71	0.67	0.63	0.68	0.64	0.60	0.57	0.58	0.55	0.53	0.53	0.50	0.48	0.41			
形式	FHF32EX-N-H	7	0.74	0.70	0.67	0.70	0.67	0.64	0.62	0.61	0.59	0.57	0.56	0.54	0.52	0.44			
光束	4,950 lm	10	0.76	0.73	0.71	0.72	0.70	0.68	0.66	0.64	0.62	0.61	0.58	0.57	0.55	0.48			


器具効率 F_t =	78.6%
上方光束 F_u =	21.3%
下方光束 F_d =	57.2%

配光分類		
BZ-		
最大取付間隔		
A-A	1.66	H
B-B	1.22	H
保守率	良	0.73
	中	0.69
	否	0.61

光 度 (cd/1000 lm)		
------------------	--	--

	A-0	B-B	C-0	A'-0	C'-0
0	115	115	115	115	115
10	180	109	152	57	69
20	202	105	178	14	31
30	228	94	188		4
40	250	80	197		
50	260	66	203		
60	263	48	201		
70	254	29	191		
80	244	12	173		
90	231		158		
100	216	1	143		
110	193	1	117		
120	145		72		
130	83		28		
140	36		4		
150	2				
160					
170	1		1		
180					

单体照度分布(初期)

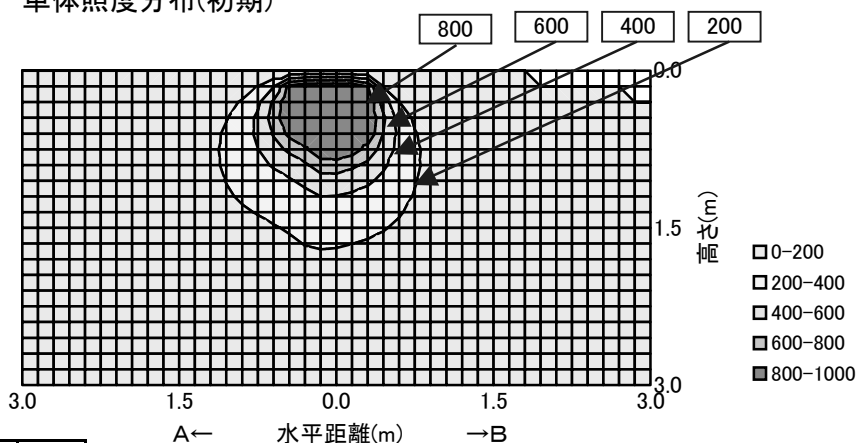

配光曲線

