

日立照明器具 照明特性

形式： HNK4105VS-PX1		反 射 率	天井	80%			70%				50%			30%			0%	
〈人検知センサー付〉			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
姿図 		0.6	0.51	0.39	0.31	0.49	0.38	0.31	0.25	0.37	0.30	0.25	0.35	0.29	0.25	0.23		
		0.8	0.59	0.48	0.40	0.58	0.47	0.39	0.33	0.45	0.38	0.33	0.43	0.37	0.33	0.30		
		1	0.65	0.54	0.46	0.63	0.53	0.45	0.39	0.51	0.44	0.39	0.49	0.43	0.38	0.36		
		1.25	0.71	0.60	0.52	0.69	0.59	0.52	0.46	0.57	0.50	0.45	0.55	0.49	0.44	0.42		
		1.5	0.75	0.65	0.58	0.73	0.64	0.57	0.51	0.62	0.55	0.50	0.59	0.54	0.50	0.47		
		2	0.80	0.72	0.65	0.78	0.71	0.64	0.59	0.68	0.63	0.58	0.66	0.61	0.57	0.54		
		2.5	0.84	0.76	0.70	0.82	0.75	0.69	0.64	0.72	0.67	0.63	0.70	0.65	0.62	0.59		
		3	0.86	0.80	0.74	0.84	0.78	0.73	0.68	0.75	0.71	0.67	0.73	0.69	0.65	0.62		
光 源		4	0.89	0.84	0.79	0.87	0.82	0.78	0.74	0.80	0.76	0.72	0.77	0.74	0.71	0.67		
品名	Hf蛍光ランプ	5	0.92	0.87	0.83	0.90	0.85	0.82	0.78	0.83	0.79	0.76	0.80	0.77	0.74	0.71		
形式	FHF32EX-N-H	7	0.94	0.91	0.88	0.92	0.89	0.86	0.83	0.86	0.84	0.81	0.84	0.82	0.80	0.76		
光束	4,950 lm	10	0.96	0.94	0.92	0.95	0.92	0.90	0.88	0.90	0.88	0.86	0.87	0.85	0.84	0.80		

器具効率 $F_t = 94.2\%$
 上方光束 $F_u = 2.9\%$
 下方光束 $F_d = 91.3\%$

配光分類

BZ-

最大取付間隔

A-A 1.38 H


B-B 1.26 H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	246	246	246
10	245	240	244
20	240	229	235
30	227	207	219
40	212	177	196
50	197	149	174
60	174	112	146
70	143	70	114
80	125	34	86
90	88		53
100	23		2
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

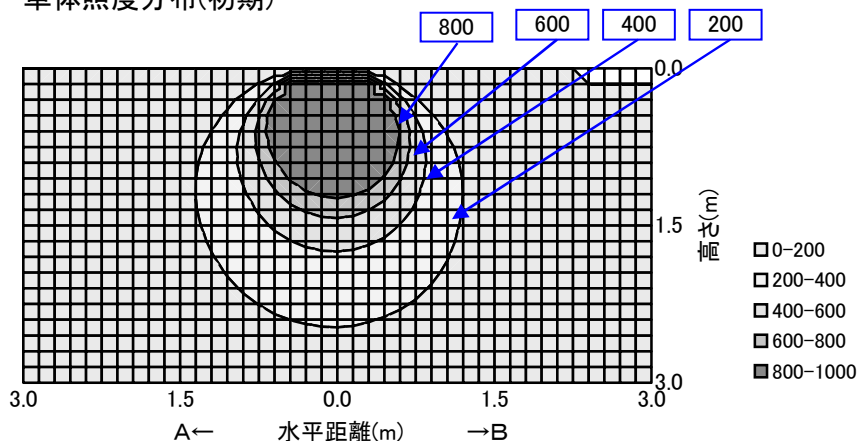

配光曲線

