

日立照明器具 照明特性

形式: HNK4109-MEU14 ＜高出力形＞	天井	80%			70%				50%			30%			0%
	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
	床	10%													
	室指数	照明率 S/H=1.0													
姿図 	0.6	0.51	0.40	0.33	0.50	0.40	0.33	0.28	0.39	0.33	0.28	0.38	0.32	0.28	0.26
	0.8	0.60	0.50	0.43	0.59	0.49	0.42	0.37	0.48	0.42	0.37	0.46	0.41	0.37	0.35
	1	0.66	0.56	0.49	0.64	0.55	0.49	0.44	0.54	0.48	0.44	0.52	0.47	0.43	0.41
	1.25	0.71	0.62	0.56	0.69	0.61	0.55	0.50	0.60	0.54	0.50	0.58	0.53	0.49	0.47
	1.5	0.75	0.67	0.61	0.73	0.66	0.60	0.55	0.64	0.59	0.55	0.62	0.58	0.54	0.52
	2	0.80	0.73	0.68	0.78	0.72	0.67	0.63	0.70	0.66	0.62	0.68	0.64	0.61	0.59
	2.5	0.83	0.77	0.72	0.81	0.76	0.71	0.67	0.74	0.70	0.66	0.72	0.68	0.65	0.63
	3	0.85	0.79	0.75	0.83	0.78	0.74	0.70	0.76	0.73	0.69	0.74	0.71	0.68	0.66
光源	4	0.87	0.83	0.79	0.86	0.82	0.78	0.75	0.80	0.77	0.74	0.78	0.75	0.73	0.70
品名	Hf蛍光灯	5	0.89	0.86	0.82	0.88	0.84	0.81	0.79	0.82	0.80	0.77	0.80	0.78	0.76
形式	FHF32EX-N-H	7	0.91	0.89	0.86	0.90	0.88	0.85	0.83	0.85	0.84	0.82	0.83	0.82	0.80
光束	4,950 lm	10	0.93	0.91	0.90	0.92	0.90	0.89	0.87	0.88	0.87	0.85	0.86	0.85	0.84

器具効率 $F_t = 89.3\%$
 上方光束 $F_u = 1.0\%$
 下方光束 $F_d = 88.3\%$

配光分類

BZ-

最大取付間隔

A-A 1.74 H


B-B 1.24 H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	240	240	240	240	240
10	330	230	309	190	191
20	450	220	413	140	141
30	520	195	497	100	101
40	510	175	506	50	52
50	430	140	397	1	7
60	230	120	180		6
70	165	80	120		4
80	130	60	76		3
90	75	1	50		
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期)

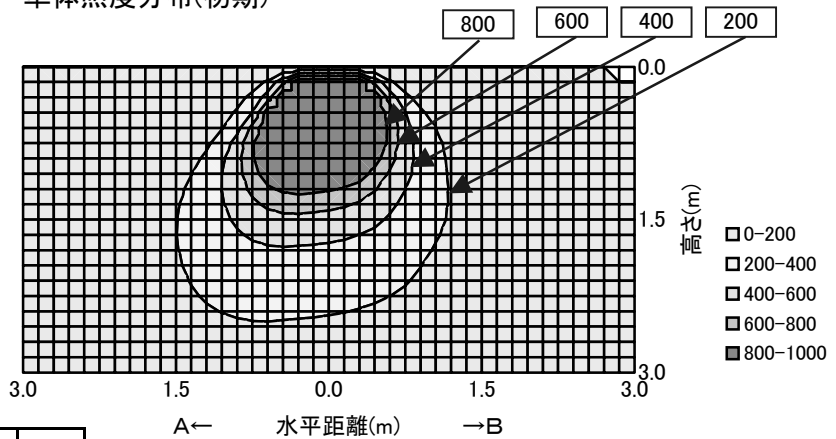

配光曲線

