



日立照明器具 照明特性

形式： HNK4205V-PKU14		反 射 率	天井	80%			70%				50%			30%			0%
<高出力形> <初期照度補正機能付>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%													
			室指数	照明率 S/H=1.0													
		0.6	0.49	0.38	0.31	0.48	0.37	0.30	0.26	0.36	0.30	0.25	0.35	0.29	0.25	0.23	
		0.8	0.57	0.47	0.39	0.56	0.46	0.39	0.34	0.44	0.38	0.33	0.43	0.37	0.33	0.31	
		1	0.63	0.53	0.45	0.61	0.52	0.45	0.40	0.50	0.44	0.39	0.49	0.43	0.39	0.37	
		1.25	0.68	0.59	0.52	0.67	0.58	0.51	0.46	0.56	0.50	0.45	0.54	0.49	0.45	0.43	
		1.5	0.72	0.64	0.57	0.71	0.63	0.56	0.51	0.61	0.55	0.51	0.59	0.54	0.50	0.48	
		2	0.78	0.70	0.64	0.76	0.69	0.64	0.59	0.67	0.62	0.58	0.65	0.61	0.57	0.55	
		2.5	0.81	0.74	0.69	0.79	0.73	0.68	0.64	0.71	0.67	0.63	0.69	0.65	0.62	0.59	
		3	0.83	0.77	0.73	0.81	0.76	0.72	0.68	0.74	0.70	0.67	0.72	0.68	0.65	0.63	
光源		4	0.86	0.81	0.77	0.84	0.80	0.76	0.73	0.78	0.75	0.72	0.76	0.73	0.70	0.68	
品名	Hf蛍光ランプ	5	0.88	0.84	0.81	0.86	0.83	0.80	0.77	0.81	0.78	0.75	0.78	0.76	0.74	0.71	
形式	FHF32EX-N-H	7	0.90	0.88	0.85	0.89	0.86	0.84	0.82	0.84	0.82	0.80	0.82	0.80	0.78	0.75	
光束	9,900 lm	10	0.92	0.90	0.88	0.91	0.89	0.87	0.86	0.87	0.85	0.84	0.85	0.83	0.82	0.79	

器具効率 Ft= 89.0%			
上方光束 Fu= 1.3%			
下方光束 Fd= 87.7%			
配光分類			
BZ-			
最大取付間隔			
A-A		1.38	H
B-B		1.26	H
保守率	良	0.73	
	中	0.69	
	否	0.61	
光度 (cd/1000 lm)			
	A-0	B-B	C-0
0	256	256	256
10	252	251	251
20	244	237	240
30	234	215	223
40	216	188	203
50	192	152	175
60	169	115	145
70	133	76	113
80	80	30	64
90	32		19
100	11		2
110			
120			
130			
140			
150			
160	1	1	1
170	2	2	2
180			

単体照度分布(初期)

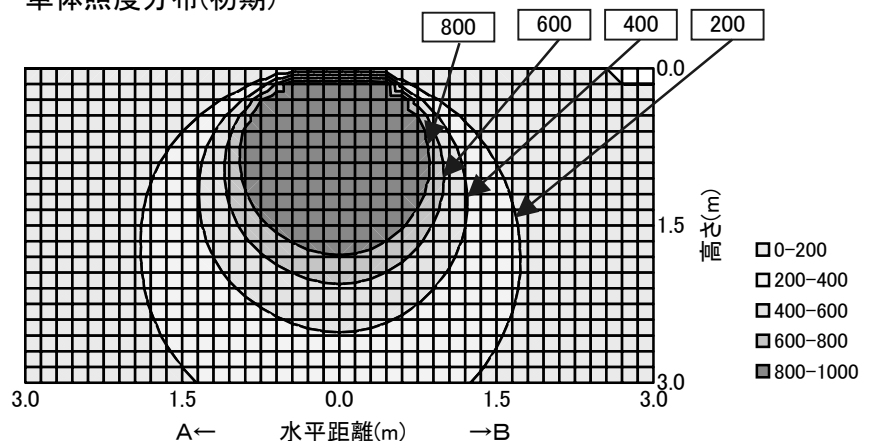

配光曲線

