

日立照明器具 照明特性

形式: HNK4223-MEN14 ＜定格出力形＞	天井	80%			70%				50%			30%			0%
	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
	床	10%													0%
	室指数	照明率 S/H=1.0													
姿図 	0.6	0.46	0.35	0.28	0.45	0.35	0.28	0.24	0.34	0.28	0.24	0.33	0.27	0.23	0.22
	0.8	0.54	0.43	0.36	0.52	0.43	0.36	0.31	0.42	0.36	0.31	0.40	0.35	0.31	0.29
	1	0.59	0.49	0.42	0.57	0.49	0.42	0.37	0.47	0.41	0.37	0.46	0.41	0.36	0.34
	1.25	0.64	0.55	0.48	0.62	0.54	0.48	0.43	0.53	0.47	0.43	0.51	0.46	0.42	0.40
	1.5	0.68	0.60	0.53	0.66	0.59	0.53	0.48	0.57	0.52	0.48	0.55	0.51	0.47	0.45
	2	0.73	0.66	0.60	0.71	0.65	0.60	0.55	0.63	0.59	0.55	0.61	0.57	0.54	0.52
	2.5	0.76	0.70	0.65	0.74	0.69	0.64	0.60	0.67	0.63	0.59	0.65	0.62	0.59	0.56
	3	0.78	0.73	0.68	0.76	0.72	0.67	0.64	0.70	0.66	0.63	0.68	0.65	0.62	0.60
	4	0.81	0.76	0.73	0.79	0.75	0.72	0.69	0.73	0.70	0.68	0.71	0.69	0.67	0.64
	5	0.82	0.79	0.76	0.81	0.78	0.75	0.72	0.76	0.73	0.71	0.74	0.72	0.70	0.67
光源															
品名	Hf蛍光灯	5	0.82	0.79	0.76	0.81	0.78	0.75	0.72	0.76	0.73	0.71	0.74	0.72	0.70
形式	FHF32EX-N-H	7	0.85	0.82	0.80	0.83	0.81	0.79	0.77	0.79	0.77	0.75	0.77	0.76	0.74
光束	7,040 lm	10	0.86	0.85	0.83	0.85	0.84	0.82	0.80	0.82	0.80	0.79	0.80	0.79	0.77

器具効率 Ft= 82.9%
 上方光束 Fu= 0.3%
 下方光束 Fd= 82.6%

配光分類

BZ-

最大取付間隔

A-A 1.44 H


B-B 1.24 H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	236	236	236
10	237	223	227
20	237	213	220
30	230	197	209
40	211	168	193
50	193	142	169
60	168	117	140
70	127	72	106
80	73	25	60
90	10	3	7
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

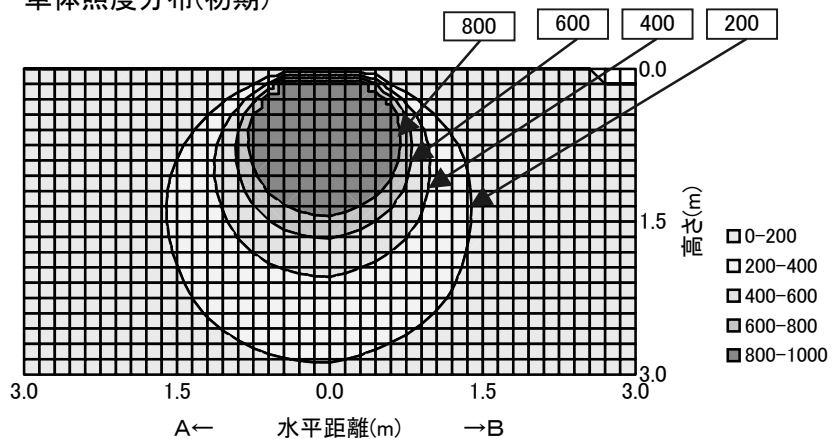

配光曲線

