

日立照明器具 照明特性

形式：HNL11220VH-EU24	反 射 率	天井	80%			70%				50%			30%			0%	
HF86ハイパワー 〈高出力形〉		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
		室指数	照明率 S/H=1.0														
	0.6	0.47	0.38	0.32	0.46	0.37	0.32	0.28	0.36	0.31	0.27	0.36	0.31	0.27	0.26		
	0.8	0.55	0.46	0.40	0.54	0.45	0.40	0.36	0.44	0.39	0.35	0.43	0.39	0.35	0.34		
	1	0.60	0.52	0.46	0.59	0.51	0.46	0.41	0.50	0.45	0.41	0.49	0.44	0.41	0.39		
	1.25	0.65	0.57	0.52	0.63	0.57	0.51	0.47	0.55	0.51	0.47	0.54	0.50	0.46	0.45		
	1.5	0.68	0.61	0.56	0.67	0.61	0.56	0.52	0.59	0.55	0.52	0.58	0.54	0.51	0.49		
	2	0.72	0.67	0.63	0.71	0.66	0.62	0.59	0.65	0.61	0.58	0.63	0.60	0.57	0.55		
	2.5	0.75	0.70	0.66	0.74	0.69	0.66	0.63	0.68	0.65	0.62	0.66	0.63	0.61	0.59		
	3	0.77	0.73	0.69	0.75	0.72	0.68	0.65	0.70	0.67	0.65	0.68	0.66	0.64	0.62		
光源	4	0.79	0.76	0.73	0.78	0.75	0.72	0.70	0.73	0.71	0.69	0.71	0.69	0.68	0.65		
品名	HF86光ランプ〈ハイパワーUV〉	5	0.80	0.78	0.75	0.79	0.77	0.75	0.72	0.75	0.73	0.71	0.73	0.72	0.70	0.68	
形式	FHF86EN-HPV-A	7	0.82	0.80	0.79	0.81	0.79	0.78	0.76	0.78	0.76	0.75	0.76	0.75	0.74	0.71	
光束	21,400 lm	10	0.84	0.82	0.81	0.83	0.81	0.80	0.79	0.80	0.79	0.78	0.78	0.77	0.76	0.74	

器具効率 Ft= 79.4%

上方光束 Fu= 0.2%

下方光束 Fd= 79.2%

配光分類

BZ-

最大取付間隔

A-A 1.34 H


B-B 1.18 H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	293	293	293
10	293	280	289
20	281	258	270
30	261	228	243
40	234	191	208
50	198	148	169
60	136	102	121
70	68	54	65
80	22	20	23
90	5	1	7
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

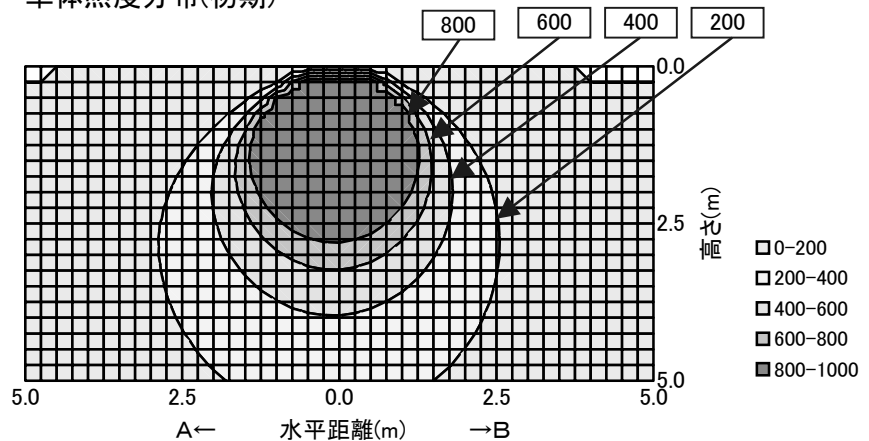

配光曲線

