

## 日立照明器具 照明特性

| 形式： HNM11220VHA-PKU24                                                             |  | 反<br>射<br>率 | 天井   | 80%         |      |      | 70%  |      |      |      | 50%  |      |      | 30%  |      |      | 0% |  |    |
|-----------------------------------------------------------------------------------|--|-------------|------|-------------|------|------|------|------|------|------|------|------|------|------|------|------|----|--|----|
| Hf86ハイパワー<br>〈高出力形〉<br>〈初期照度補正機能付〉                                                |  |             | 壁    | 70%         | 50%  | 30%  | 70%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 0% |  |    |
|                                                                                   |  |             | 床    | 10%         |      |      |      |      |      |      |      |      |      |      |      |      |    |  | 0% |
|                                                                                   |  |             | 室指数  | 照明率 S/H=1.0 |      |      |      |      |      |      |      |      |      |      |      |      |    |  |    |
|  |  | 0.6         | 0.48 | 0.37        | 0.31 | 0.47 | 0.37 | 0.30 | 0.26 | 0.36 | 0.30 | 0.26 | 0.35 | 0.30 | 0.26 | 0.24 |    |  |    |
|                                                                                   |  | 0.8         | 0.56 | 0.46        | 0.39 | 0.55 | 0.45 | 0.39 | 0.34 | 0.44 | 0.38 | 0.34 | 0.43 | 0.38 | 0.34 | 0.32 |    |  |    |
|                                                                                   |  | 1           | 0.62 | 0.52        | 0.45 | 0.60 | 0.51 | 0.45 | 0.40 | 0.50 | 0.44 | 0.40 | 0.49 | 0.44 | 0.40 | 0.38 |    |  |    |
|                                                                                   |  | 1.25        | 0.67 | 0.58        | 0.52 | 0.65 | 0.57 | 0.51 | 0.47 | 0.56 | 0.51 | 0.46 | 0.54 | 0.50 | 0.46 | 0.44 |    |  |    |
|                                                                                   |  | 1.5         | 0.71 | 0.63        | 0.57 | 0.69 | 0.62 | 0.56 | 0.52 | 0.60 | 0.55 | 0.51 | 0.59 | 0.55 | 0.51 | 0.49 |    |  |    |
|                                                                                   |  | 2           | 0.76 | 0.69        | 0.64 | 0.74 | 0.68 | 0.63 | 0.59 | 0.67 | 0.62 | 0.59 | 0.65 | 0.61 | 0.58 | 0.56 |    |  |    |
|                                                                                   |  | 2.5         | 0.79 | 0.73        | 0.68 | 0.77 | 0.72 | 0.68 | 0.64 | 0.70 | 0.67 | 0.63 | 0.69 | 0.65 | 0.62 | 0.60 |    |  |    |
| 光源                                                                                |  | 3           | 0.81 | 0.76        | 0.72 | 0.79 | 0.75 | 0.71 | 0.68 | 0.73 | 0.70 | 0.67 | 0.71 | 0.68 | 0.66 | 0.63 |    |  |    |
| 品名                                                                                |  | 4           | 0.83 | 0.79        | 0.76 | 0.82 | 0.78 | 0.75 | 0.72 | 0.77 | 0.74 | 0.71 | 0.75 | 0.72 | 0.70 | 0.68 |    |  |    |
| 形式                                                                                |  | 5           | 0.85 | 0.82        | 0.79 | 0.84 | 0.81 | 0.78 | 0.76 | 0.79 | 0.77 | 0.75 | 0.77 | 0.75 | 0.73 | 0.71 |    |  |    |
| 光束                                                                                |  | 7           | 0.87 | 0.85        | 0.83 | 0.86 | 0.84 | 0.82 | 0.80 | 0.82 | 0.80 | 0.79 | 0.80 | 0.79 | 0.77 | 0.75 |    |  |    |
| 21,400 lm                                                                         |  | 10          | 0.89 | 0.87        | 0.86 | 0.88 | 0.86 | 0.85 | 0.84 | 0.84 | 0.83 | 0.82 | 0.82 | 0.81 | 0.81 | 0.78 |    |  |    |

器具効率 Ft= 84.7%

上方光束 Fu= 0.0%

下方光束 Fd= 84.6%

配光分類

BZ-

最大取付間隔

A-A 1.38 H


B-B 1.30 H

| 保守率 | 良 | 0.73 |
|-----|---|------|
|     | 中 | 0.69 |
|     | 否 | 0.61 |

光度 (cd/1000 lm)

|     | A-0 | B-B | C-0 |
|-----|-----|-----|-----|
| 0   | 260 | 260 | 260 |
| 10  | 258 | 255 | 257 |
| 20  | 250 | 244 | 247 |
| 30  | 237 | 224 | 231 |
| 40  | 220 | 198 | 210 |
| 50  | 195 | 166 | 184 |
| 60  | 154 | 128 | 150 |
| 70  | 89  | 86  | 100 |
| 80  | 30  | 38  | 36  |
| 90  | 1   | 1   | 1   |
| 100 |     |     |     |
| 110 |     |     |     |
| 120 |     |     |     |
| 130 |     |     |     |
| 140 |     |     |     |
| 150 |     |     |     |
| 160 |     |     |     |
| 170 |     |     |     |
| 180 |     |     |     |

単体照度分布(初期)

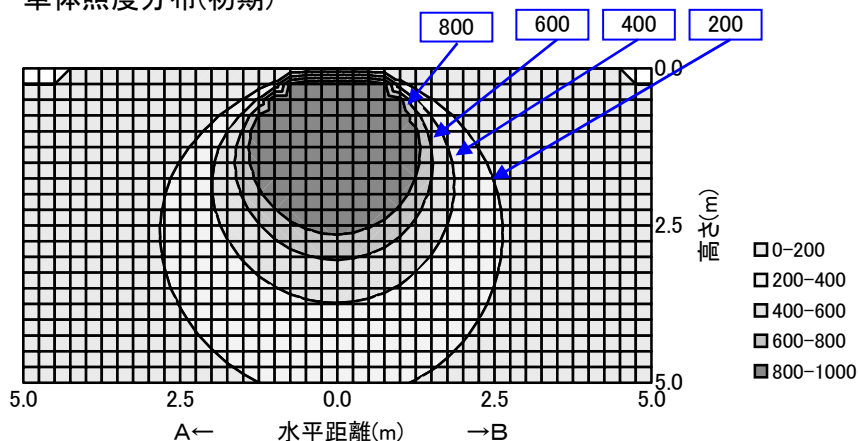

配光曲線

