


日立照明器具 照明特性


形式: HNM11142VA-EN24		天井	80%			70%				50%			30%			0%
<定格出力形>		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
		室指数	照明率 S/H=1.0													
姿図 	光源	0.6	0.45	0.33	0.26	0.43	0.33	0.26	0.21	0.32	0.25	0.21	0.31	0.25	0.20	0.19
		0.8	0.53	0.42	0.35	0.52	0.41	0.34	0.29	0.40	0.34	0.29	0.39	0.33	0.29	0.27
		1	0.59	0.49	0.41	0.57	0.48	0.41	0.35	0.46	0.40	0.35	0.45	0.39	0.35	0.33
		1.25	0.64	0.55	0.48	0.63	0.54	0.47	0.42	0.52	0.46	0.42	0.51	0.45	0.41	0.39
		1.5	0.69	0.60	0.53	0.67	0.59	0.53	0.47	0.57	0.52	0.47	0.55	0.51	0.46	0.44
		2	0.74	0.67	0.61	0.72	0.66	0.60	0.55	0.64	0.59	0.55	0.62	0.58	0.54	0.52
		2.5	0.77	0.71	0.66	0.76	0.70	0.65	0.61	0.68	0.64	0.60	0.66	0.62	0.59	0.57
		3	0.80	0.74	0.69	0.78	0.73	0.68	0.64	0.71	0.67	0.64	0.69	0.66	0.63	0.60
		4	0.83	0.78	0.74	0.81	0.77	0.73	0.70	0.75	0.72	0.69	0.73	0.70	0.68	0.65
		5	0.85	0.81	0.77	0.83	0.80	0.77	0.74	0.78	0.75	0.73	0.76	0.73	0.71	0.69
品名	Hf蛍光ランプ	7	0.87	0.84	0.82	0.86	0.83	0.81	0.79	0.81	0.79	0.77	0.79	0.77	0.76	0.73
形式	FHF86EN	10	0.89	0.87	0.85	0.88	0.86	0.84	0.83	0.84	0.82	0.81	0.82	0.81	0.79	0.77
光束	9,200 lm															

器具効率 Ft= 85.4%		
上方光束 Fu= 0.3%		
下方光束 Fd= 85.1%		
配光分類		
BZ-		
最大取付間隔		
A-A	2.14	H
B-B	1.24	H
保守率	良	0.73
	中	0.69
	否	0.61
光度 (cd/1000 lm)		

単体照度分布(初期)

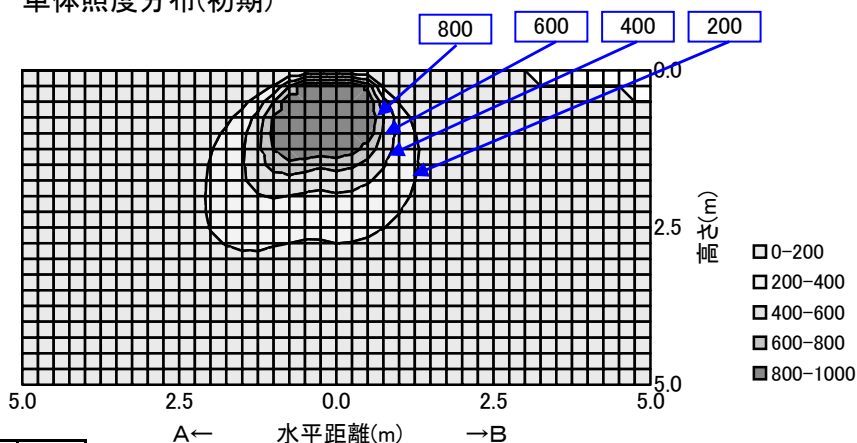

配光曲線

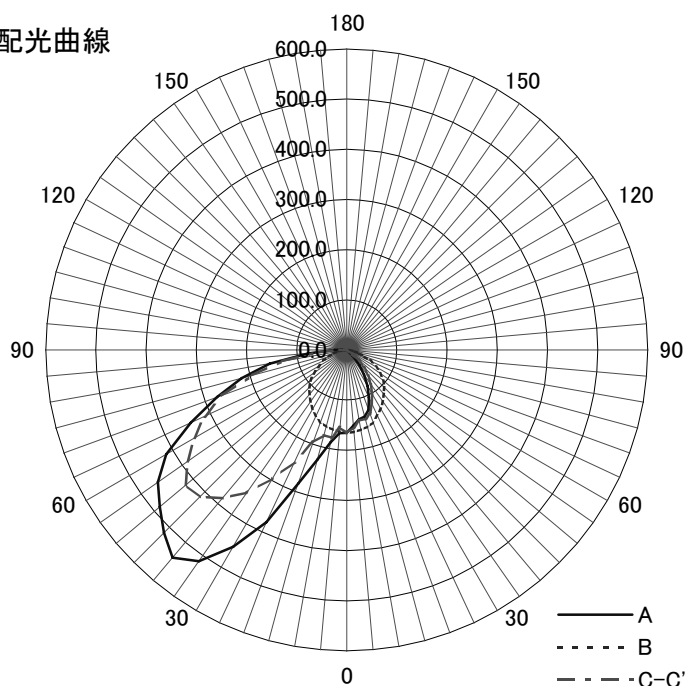

	A-0	B-B	C-0	A'-0	C'-0
0	165	165	165	165	165
10	187	161	177	140	143
20	284	153	195	127	135
30	453	136	296	83	100
40	540	115	385	40	67
50	486	95	418	2	32
60	415	67	351		2
70	275	38	264		
80	156	16	130		
90	25		14		
100					
110					
120					
130					
140					
150					
160					
170					
180					