


日立照明器具 照明特性

形式： HNM11142VA-PKN14 ＜定格出力形＞ ＜初期照度補正機能付＞		反 射 率	天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
姿図 	0.6	0.45	0.33	0.26	0.43	0.33	0.26	0.21	0.32	0.25	0.21	0.31	0.25	0.20	0.19			
	0.8	0.53	0.42	0.35	0.52	0.41	0.34	0.29	0.40	0.34	0.29	0.39	0.33	0.29	0.27			
	1	0.59	0.49	0.41	0.57	0.48	0.41	0.35	0.46	0.40	0.35	0.45	0.39	0.35	0.33			
	1.25	0.64	0.55	0.48	0.63	0.54	0.47	0.42	0.52	0.46	0.42	0.51	0.45	0.41	0.39			
	1.5	0.69	0.60	0.53	0.67	0.59	0.53	0.47	0.57	0.52	0.47	0.55	0.51	0.46	0.44			
	2	0.74	0.67	0.61	0.72	0.66	0.60	0.55	0.64	0.59	0.55	0.62	0.58	0.54	0.52			
	2.5	0.77	0.71	0.66	0.76	0.70	0.65	0.61	0.68	0.64	0.60	0.66	0.62	0.59	0.57			
	3	0.80	0.74	0.69	0.78	0.73	0.68	0.64	0.71	0.67	0.64	0.69	0.66	0.63	0.60			
光 源		4	0.83	0.78	0.74	0.81	0.77	0.73	0.70	0.75	0.72	0.69	0.73	0.70	0.68	0.65		
品名	Hf蛍光ランプ	5	0.85	0.81	0.77	0.83	0.80	0.77	0.74	0.78	0.75	0.73	0.76	0.73	0.71	0.69		
形式	FHF86EN	7	0.87	0.84	0.82	0.86	0.83	0.81	0.79	0.81	0.79	0.77	0.79	0.77	0.76	0.73		
光束	9,200 lm	10	0.89	0.87	0.85	0.88	0.86	0.84	0.83	0.84	0.82	0.81	0.82	0.81	0.79	0.77		

器具効率 Ft= 85.4%		
上方光束 Fu= 0.3%		
下方光束 Fd= 85.1%		
配光分類		
BZ-		
最大取付間隔		
A-A	2.14	H
B-B	1.24	H
保守率	良	0.74
	中	0.69
	否	0.61
光度 (cd/1000 lm)		

単体照度分布(初期)

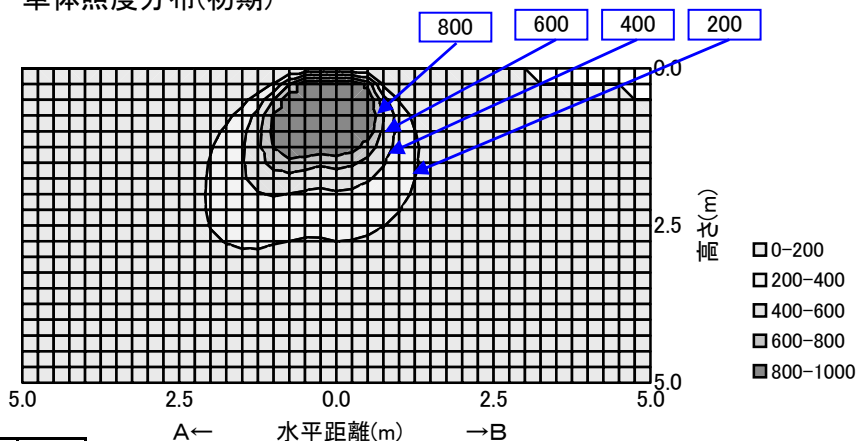

配光曲線

