

日立照明器具 照明特性

形式： HNM11203VHA-PKU24		反 射 率	天井	80%			70%				50%			30%			0%	
Hf86/ハイパワー 〈高出力形〉 〈初期照度補正機能付〉			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
姿図			0.6	0.48	0.36	0.28	0.46	0.35	0.28	0.22	0.32	0.26	0.21	0.30	0.24	0.20	0.17	
			0.8	0.56	0.45	0.37	0.54	0.43	0.35	0.30	0.40	0.33	0.28	0.36	0.31	0.26	0.23	
			1	0.62	0.51	0.43	0.59	0.49	0.41	0.35	0.45	0.38	0.33	0.41	0.36	0.31	0.27	
			1.25	0.67	0.57	0.49	0.64	0.55	0.47	0.42	0.50	0.44	0.39	0.46	0.41	0.37	0.32	
			1.5	0.72	0.62	0.54	0.68	0.59	0.52	0.47	0.55	0.49	0.44	0.50	0.45	0.41	0.36	
			2	0.77	0.69	0.62	0.74	0.66	0.60	0.54	0.61	0.55	0.51	0.56	0.51	0.48	0.42	
			2.5	0.81	0.73	0.67	0.77	0.70	0.64	0.59	0.65	0.60	0.56	0.60	0.56	0.52	0.46	
			3	0.83	0.76	0.70	0.79	0.73	0.68	0.63	0.68	0.63	0.59	0.62	0.59	0.55	0.49	
光 源		4	0.86	0.81	0.76	0.83	0.78	0.73	0.69	0.72	0.68	0.65	0.66	0.63	0.60	0.53		
品 名	Hf蛍光ランプ〈ハイパワー-UV〉	5	0.89	0.84	0.80	0.85	0.81	0.77	0.73	0.75	0.72	0.69	0.69	0.66	0.64	0.57		
形式	FHF86EN-HPV	7	0.91	0.88	0.84	0.88	0.85	0.81	0.79	0.78	0.76	0.74	0.73	0.71	0.69	0.61		
光束	21,400 lm	10	0.93	0.91	0.88	0.90	0.88	0.85	0.83	0.82	0.80	0.78	0.76	0.74	0.73	0.65		

器具効率 Ft= 95.1%
上方光束 Fu= 19.9%
下方光束 Fd= 75.2%

配光分類

BZ-

最大取付間隔

A-A 1.48 H


B-B 1.28 H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	178	178	178
10	178	174	176
20	176	166	171
30	174	152	163
40	168	133	152
50	156	110	137
60	149	84	118
70	148	54	106
80	133	23	98
90	87	1	57
100	76		46
110	67		42
120	62		44
130	60		41
140	52		22
150	26		7
160	4		
170			
180			

単体照度分布(初期)

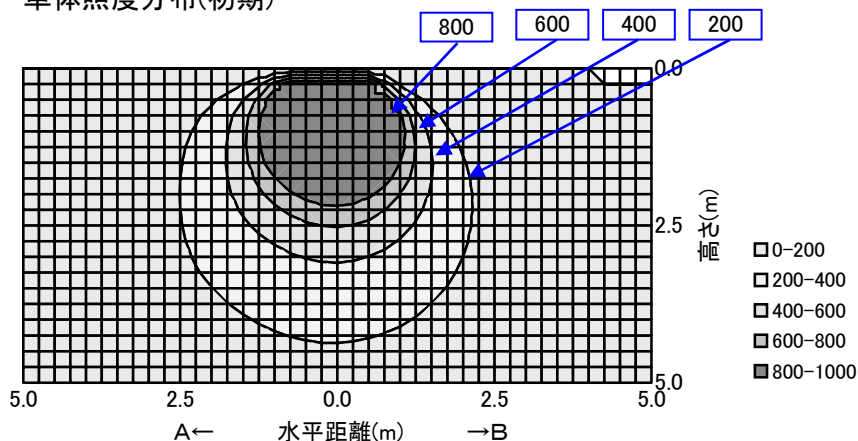

配光曲線

