



日立照明器具 照明特性

形式: HNM11220VB-EN		反 射 率	天井	80%			70%				50%			30%			0%		
<定格出力形> <初期照度補正形> <連続調光形>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
		0.6	0.49	0.39	0.32	0.48	0.38	0.31	0.27	0.37	0.31	0.27	0.36	0.31	0.27	0.25			
		0.8	0.58	0.48	0.40	0.57	0.47	0.40	0.35	0.46	0.40	0.35	0.44	0.39	0.35	0.33			
		1	0.64	0.54	0.47	0.62	0.53	0.47	0.42	0.52	0.46	0.41	0.50	0.45	0.41	0.39			
		1.25	0.69	0.60	0.53	0.67	0.59	0.53	0.48	0.58	0.52	0.48	0.56	0.51	0.47	0.45			
		1.5	0.73	0.65	0.59	0.71	0.64	0.58	0.54	0.62	0.57	0.53	0.61	0.56	0.53	0.50			
		2	0.78	0.71	0.66	0.77	0.71	0.65	0.61	0.69	0.64	0.61	0.67	0.63	0.60	0.58			
		2.5	0.81	0.75	0.71	0.80	0.74	0.70	0.66	0.73	0.69	0.65	0.71	0.67	0.65	0.62			
		3	0.83	0.78	0.74	0.82	0.77	0.73	0.70	0.75	0.72	0.69	0.73	0.70	0.68	0.66			
光源		4	0.86	0.82	0.79	0.85	0.81	0.78	0.75	0.79	0.76	0.74	0.77	0.75	0.73	0.70			
品名	Hf蛍光ランプ	5	0.88	0.85	0.82	0.87	0.84	0.81	0.78	0.82	0.79	0.77	0.80	0.78	0.76	0.73			
形式	FHF86EN-K	7	0.90	0.88	0.85	0.89	0.87	0.85	0.83	0.85	0.83	0.81	0.83	0.81	0.80	0.77			
光束	18,000 lm	10	0.92	0.90	0.89	0.91	0.89	0.88	0.86	0.87	0.86	0.85	0.85	0.84	0.83	0.81			

器具効率 Ft= 87.4%		
上方光束 Fu= 0.0%		
下方光束 Fd= 87.4%		
配光分類		
BZ-		
最大取付間隔		
A-A	1.38	H
B-B	1.28	H
保守率	良	0.73
	中	0.69
	否	0.61

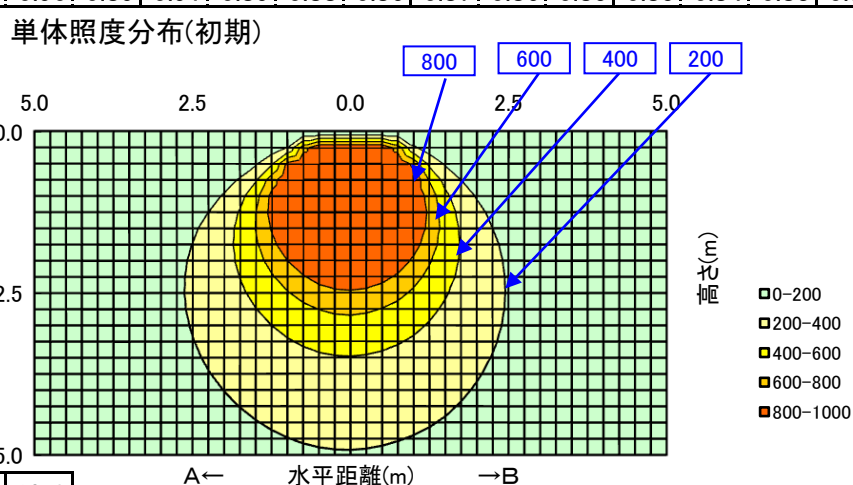

光 度 (cd/1000 lm)				5.0	
	A-0	B-B	C-0	A'-0	C'-0
0	269	269	269		
10	267	263	265		
20	258	252	255		
30	245	231	239		
40	227	205	217		
50	201	171	190		
60	159	132	155		
70	92	89	103		
80	31	39	37		
90	1	1	1		
100					
110					
120					
130					
140					
150					
160					
170					
180					

