


日立照明器具 照明特性

形式：HNM11220VH-EU24		反 射 率	天井	80%			70%				50%			30%			0%
HF86/ハイパワー 〈高出力形〉			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%													
		室指数	照明率 S/H=1.0														
姿図 		0.6	0.48	0.37	0.31	0.47	0.37	0.30	0.26	0.36	0.30	0.26	0.35	0.30	0.26	0.24	
		0.8	0.56	0.46	0.39	0.55	0.45	0.39	0.34	0.44	0.38	0.34	0.43	0.38	0.34	0.32	
		1	0.62	0.52	0.45	0.60	0.51	0.45	0.40	0.50	0.44	0.40	0.49	0.44	0.40	0.38	
		1.25	0.67	0.58	0.52	0.65	0.57	0.51	0.47	0.56	0.51	0.46	0.54	0.50	0.46	0.44	
		1.5	0.71	0.63	0.57	0.69	0.62	0.56	0.52	0.60	0.55	0.51	0.59	0.55	0.51	0.49	
		2	0.76	0.69	0.64	0.74	0.68	0.63	0.59	0.67	0.62	0.59	0.65	0.61	0.58	0.56	
		2.5	0.79	0.73	0.68	0.77	0.72	0.68	0.64	0.70	0.67	0.63	0.69	0.65	0.62	0.60	
光源		3	0.81	0.76	0.72	0.79	0.75	0.71	0.68	0.73	0.70	0.67	0.71	0.68	0.66	0.63	
		4	0.83	0.79	0.76	0.82	0.78	0.75	0.72	0.77	0.74	0.71	0.75	0.72	0.70	0.68	
品名	HF蛍光ランプ〈ハイパワーUV〉	5	0.85	0.82	0.79	0.84	0.81	0.78	0.76	0.79	0.77	0.75	0.77	0.75	0.73	0.71	
形式	FHF86EN-HPV	7	0.87	0.85	0.83	0.86	0.84	0.82	0.80	0.82	0.80	0.79	0.80	0.79	0.77	0.75	
光束	21,400 lm	10	0.89	0.87	0.86	0.88	0.86	0.85	0.84	0.84	0.83	0.82	0.82	0.81	0.81	0.78	

器具効率 Ft= 84.7%			
上方光束 Fu= 0.0%			
下方光束 Fd= 84.6%			
配光分類			
BZ-			
最大取付間隔			
A-A		1.38 H	
B-B		1.30 H	
保守率	良	0.73	
	中	0.69	
	否	0.61	
光 度 (cd/1000 lm)			
	A-0	B-B	C-0
0	260	260	260
10	258	255	257
20	250	244	247
30	237	224	231
40	220	198	210
50	195	166	184
60	154	128	150
70	89	86	100
80	30	38	36
90	1	1	1
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

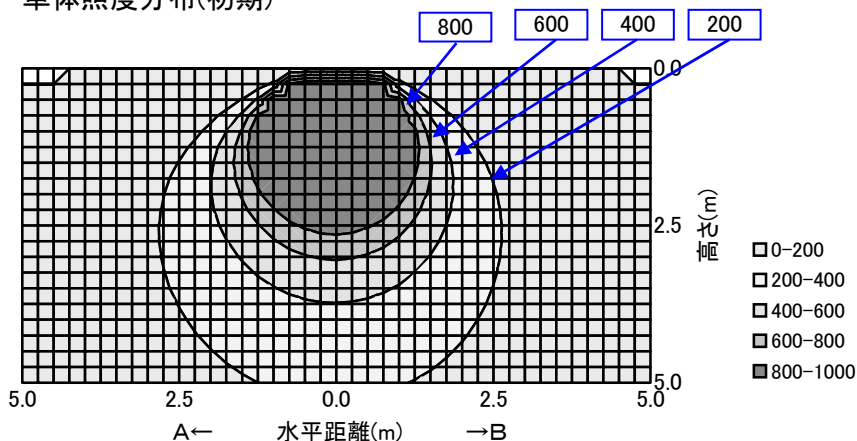

配光曲線

