

日立照明器具 照明特性

形式：HNM11361-EN		反 射 率	天井	80%			70%				50%			30%			0%		
<定格出力>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
姿図 		0.6	0.41	0.31	0.25	0.39	0.30	0.24	0.20	0.28	0.23	0.19	0.27	0.22	0.19	0.16			
		0.8	0.48	0.38	0.32	0.46	0.37	0.31	0.27	0.35	0.30	0.26	0.33	0.28	0.25	0.22			
		1	0.53	0.44	0.37	0.51	0.42	0.36	0.32	0.40	0.35	0.30	0.37	0.33	0.29	0.26			
		1.25	0.57	0.49	0.43	0.55	0.47	0.42	0.37	0.45	0.40	0.36	0.42	0.38	0.34	0.31			
		1.5	0.61	0.53	0.47	0.58	0.51	0.46	0.41	0.48	0.44	0.40	0.45	0.41	0.38	0.35			
		2	0.65	0.59	0.53	0.63	0.57	0.52	0.48	0.54	0.49	0.46	0.50	0.47	0.44	0.40			
		2.5	0.68	0.62	0.57	0.66	0.60	0.56	0.52	0.57	0.53	0.50	0.54	0.50	0.48	0.43			
		3	0.70	0.65	0.60	0.68	0.63	0.59	0.55	0.59	0.56	0.53	0.56	0.53	0.50	0.46			
光源		4	0.72	0.68	0.65	0.70	0.66	0.63	0.60	0.63	0.60	0.57	0.59	0.57	0.55	0.50			
品名	Hf蛍光ランプ	5	0.74	0.71	0.68	0.72	0.69	0.66	0.63	0.65	0.62	0.60	0.61	0.59	0.57	0.53			
形式	FHF86EN	7	0.76	0.74	0.71	0.74	0.72	0.69	0.67	0.68	0.66	0.64	0.64	0.63	0.61	0.56			
光束	27,600 lm	10	0.78	0.76	0.74	0.76	0.74	0.72	0.71	0.70	0.69	0.67	0.66	0.65	0.64	0.59			

器具効率 Ft= 77.6%

上方光束 Fu= 10.8%

下方光束 Fd= 66.8%

配光分類

BZ-

最大取付間隔

A-A 1.50 H


B-B 1.26 H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	174	174	174
10	174	172	173
20	173	162	168
30	170	147	160
40	166	126	147
50	161	101	133
60	136	72	117
70	113	44	93
80	80	11	57
90	59		39
100	52		35
110	48		25
120	36		17
130	19		10
140	14		8
150	5		3
160			
170			
180			

単体照度分布(初期)

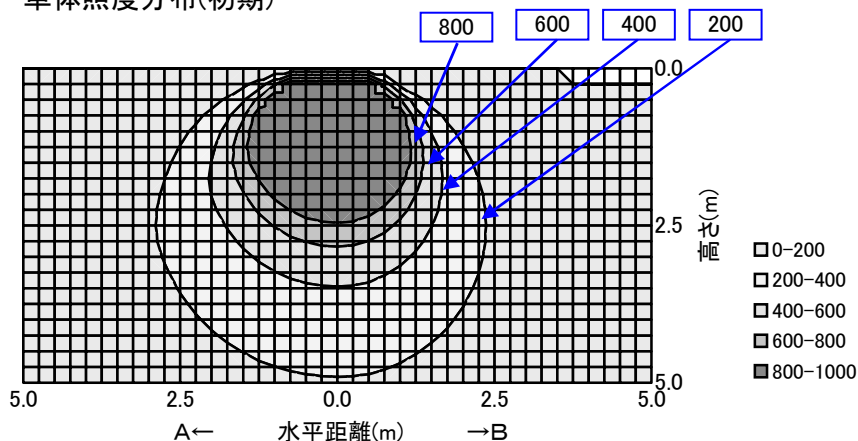

配光曲線

