



日立照明器具 照明特性

形式: HNM4105VS-PX		天井	80%			70%				50%			30%			0%	
<高出力形> <人感センサー付>		反射率	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%													
		室指数	照明率 S/H=1.0														
姿図 	0.6	0.47	0.35	0.27	0.44	0.33	0.26	0.21	0.30	0.24	0.19	0.27	0.21	0.17	0.14		
	0.8	0.56	0.44	0.36	0.52	0.41	0.34	0.28	0.37	0.31	0.26	0.33	0.27	0.23	0.18		
	1	0.61	0.50	0.42	0.58	0.47	0.40	0.34	0.42	0.36	0.31	0.37	0.32	0.28	0.22		
	1.25	0.67	0.56	0.48	0.63	0.53	0.46	0.40	0.47	0.41	0.36	0.42	0.37	0.33	0.26		
	1.5	0.71	0.61	0.53	0.67	0.58	0.51	0.45	0.52	0.46	0.41	0.46	0.41	0.37	0.30		
	2	0.76	0.68	0.61	0.72	0.64	0.58	0.53	0.57	0.52	0.48	0.51	0.47	0.43	0.35		
	2.5	0.80	0.72	0.66	0.75	0.69	0.63	0.58	0.61	0.57	0.52	0.55	0.51	0.47	0.39		
	3	0.82	0.76	0.70	0.78	0.72	0.66	0.62	0.64	0.60	0.56	0.57	0.54	0.50	0.41		
	4	0.86	0.80	0.75	0.81	0.76	0.72	0.67	0.68	0.65	0.61	0.61	0.58	0.55	0.45		
光源	4	0.86	0.80	0.75	0.81	0.76	0.72	0.67	0.68	0.65	0.61	0.61	0.58	0.55	0.45		
品名	Hf蛍光ランプ	5	0.88	0.83	0.79	0.83	0.79	0.75	0.71	0.71	0.68	0.65	0.63	0.61	0.58	0.48	
形式	FHF32EX-N-K	7	0.91	0.87	0.84	0.86	0.83	0.80	0.77	0.75	0.72	0.70	0.67	0.65	0.63	0.52	
光束	4,800 lm	10	0.93	0.90	0.88	0.88	0.86	0.84	0.81	0.78	0.76	0.74	0.70	0.68	0.67	0.56	


器具効率 Ft= 96.9%			
上方光束 Fu= 31.2%			
下方光束 Fd= 65.8%			
配光分類			
BZ-			
最大取付間隔			
A-A		1.70	H
B-B		1.22	H
保守率	良	0.73	
	中	0.69	
	否	0.61	
光度 (cd/1000 lm)			
	A-0	B-B	C-0
0	138	138	138
10	140	134	137
20	145	126	136
30	151	113	134
40	154	95	129
50	154	79	123
60	149	53	114
70	138	31	99
80	126	11	84
90	119		74
100	119		77
110	121		85
120	125		89
130	117		45
140	60		1
150			
160			
170	1	1	1
180			

単体照度分布(初期)

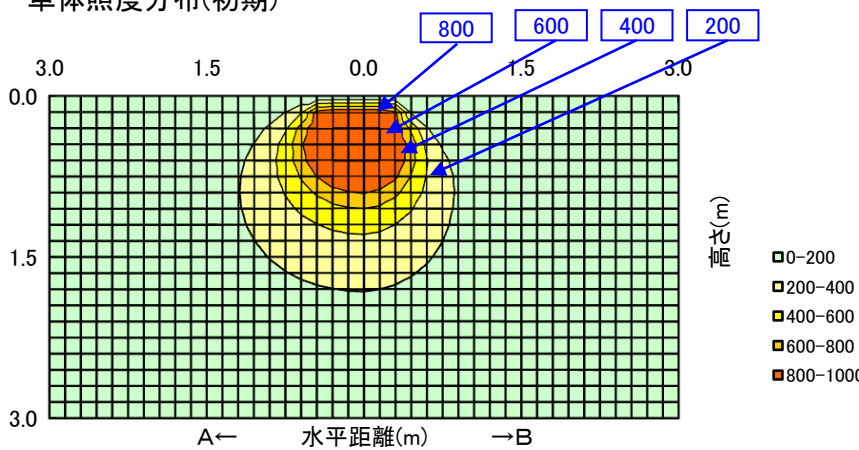

0-200
200-400
400-600
600-800
800-1000

配光曲線

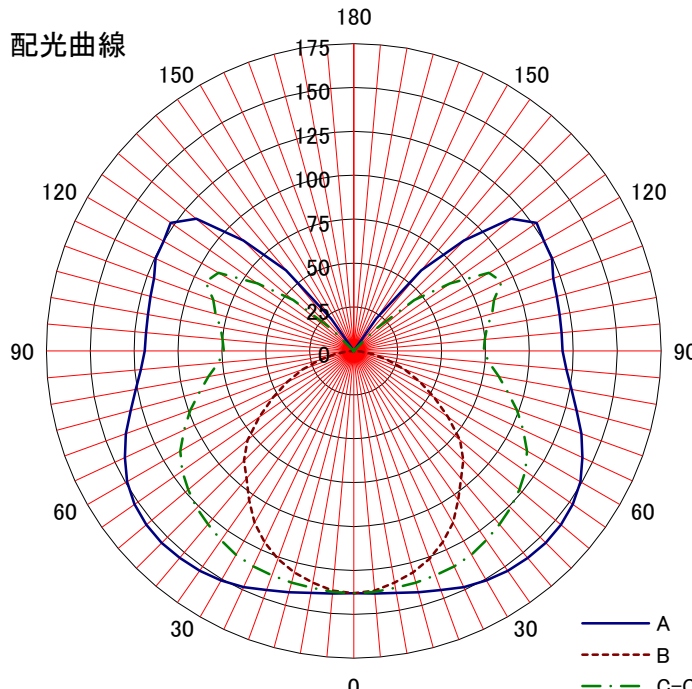

A
B
C-C'

HNM4105V-MEU14(R1)